

### We invite you to experience exceptional shade.

Frankford has been in the shade business for more than 120 years, providing superior quality umbrellas to the contract and retail industries. We are a dynamic and thriving company in the outdoor living industry, specializing in modern and traditional shade solution designs. Known primarily for providing hotels, resorts, and restaurant chains with durable and long-lasting umbrellas, Frankford Umbrellas have become a staple in not only thousands of commercial settings throughout Canada, the United States, Mexico and the Caribbean but also countless residential settings.

The beauty, design, and superior elements of our umbrellas allow you to bring home the enhanced resort and dining experience, to your cherished outdoor living space. We use only the highest quality materials in manufacturing our umbrellas, and they truly are the best in the industry. We believe in providing our partners an exceptional product, at a reasonable price, with superior customer service.

Precisely crafted, our umbrellas are built to withstand the harshest conditions. Our procedures and inventory systems constantly evolve to ensure we meet all the expectations of our clients. Our ultimate goal is to exceed your expectations. This goal has generated thousands of longlasting relationships with commercial and residential clients alike. So, while it is typically years before our customers need to return, they always do.

Whether you're a country club, resort and spa, or a family that enjoys your outdoor space as much as your indoor space, once you've experienced our umbrellas, and more importantly our personal commitment to satisfying the needs of our customers, we are confident you will become a customer for life. Find your perfect umbrella through one of our valued dealers or at a retail store near you.

F

We invite you to experience exceptional shade.



# AURORA PREMIUM ALUMINUM CANTILEVER

11ft. Octagonal Premium Aluminum Cantilever Umbrella / **MS** - Brushed Silver Anodized Finish Recasens® R-016 Blue Stripe (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: **DP-BK** - Eclipse®/Aurora Specific Surface Deck Plate



### WIND RATINGS

Wind ratings do NOT form any part of, nor fall under, any of Frankford Umbrellas' warranties. Wind ratings are intended as a guide to the relative strength of the umbrellas only and tested at their optimal positions. Umbrellas with any degree of tilt should not follow the below ratings. Wind can be extremely variable, depending on the surroundings, elevation, gusts, etc.

In any high wind or sudden extreme weather conditions, all umbrellas should be closed and secured immediately, regardless of size, weight, or base weight and never be left unattended in the open position. This will reduce the risk of damage to your umbrella, furniture, and property.

Frankford Umbrellas have been tested successfully in extreme weather and winds up to 40-50 mph. However, we strongly recommend closing your umbrella when not in use or when sustained winds exceed 25 mph. Frankford can recommend specific bases and anchoring systems for specific umbrellas (pg. 46). However, these are only recommended weights as different environments may require different base options. Umbrellas must be secured to a sufficiently weighted umbrella base.

Please contact us for assistance in choosing the proper umbrella base or anchoring system. In the event Frankford shade products are left open and/or unattended in harsh weather conditions, our customer service department is here to help you and promptly assist with parts for repairs. Our shade products offer modular, self-repairable components which allow customers to service the umbrellas to keep them in perfect working condition.

If using our umbrellas on a rooftop or an elevated patio above the ground level of the property, published wind ratings do not apply. We strongly recommend increasing minimum suggested base weights by double or triple.

Our umbrellas, in the opened or closed position, when using a surface base, should be closed and stored when not in use. This is to ensure that high winds do not cause the umbrella to fall over and cause injury or property damage. Failure to take these precautions will void all manufacturer warranties.

#### **ECLIPSE<sup>®</sup> CANTILEVER**

- Engineered to withstand 35 mph sustained winds.
- Wind Stabilizer Kit +5 mph (40 mph)

#### **ECLIPSE RECTANGLE SPECIFIC**

AURORA CANTILEVER

- Engineered to withstand 15 mph sustained winds.
- Wind Stabilizer Kit +5 mph (20 mph)

#### **G-SERIES GIANT MARKET**

- **GREENWICH** : Engineered to withstand 30 mph sustained winds.
- **MONTEREY**: Engineered to withstand 35 mph sustained winds.

#### **MONTEREY FIBERGLASS MARKET**

Engineered to withstand 40 mph sustained winds.

#### **MONTEREY RECTANGLE SPECIFIC**

• Engineered to withstand 25 mph sustained winds.

#### **GREENWICH ALUMINUM MARKET**

Engineered to withstand 30 mph sustained winds.

Wind Stabilizer Kit +5 mph (30 mph)

#### AURORA FIBERGLASS CANTILEVER

• Engineered to withstand 30 mph sustained winds.


Engineered to withstand 25 mph sustained winds.

#### **NOVA GIANT TELESCOPING**

• Engineered to withstand 50 mph sustained winds.

# SHADE DESIGNER

The Shade Designer<sup>™</sup> is an immersive 3D digital space that allows you to design your own umbrella and interact with your unique creation. Choose from hundreds of fabrics colors and patterns, multiple canopy styles, and finishing additions like various trim styles and custom binding.

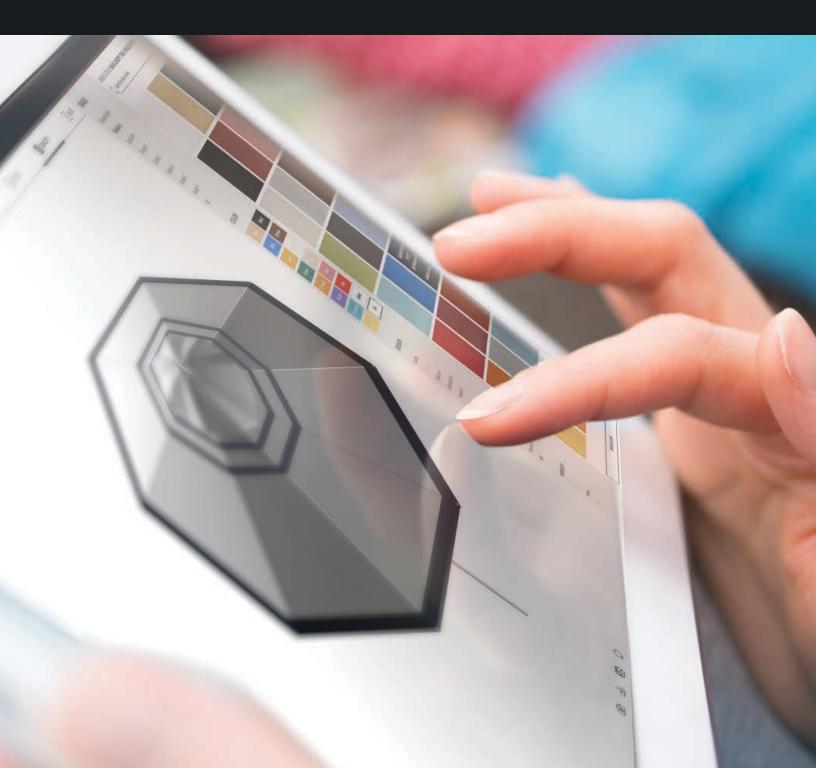



# **GREENWICH DESIGNER ALUMINUM MARKET**

9ft. Octagon Aluminum Market Umbrella • 1.5" Diameter Pole-Pulley Lift / SR - Platinum Anodized Finish

VF - Chrome Plated Vertex Finial

Recasens<sup>®</sup> R-099 White (**GRADE A**) / Recasens<sup>®</sup> R-175 Navy Blue (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: **100A-SM** - 100 lbs. Aluminum Concrete Filled Base w/Wheels in Silver Mist Powder Coat Finish



Visit our Shade Designer






# ECLIPSE<sup>®</sup> DESIGNER CANTILEVER

10ft. x 10ft. Square Designer Aluminum Cantilever Umbrella / **MS** - Brushed Silver Anodized Finish Recasens® R-099 White (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: **DP-SS** - Eclipse®/Aurora Specific Stainless Steel Surface Deck Plate





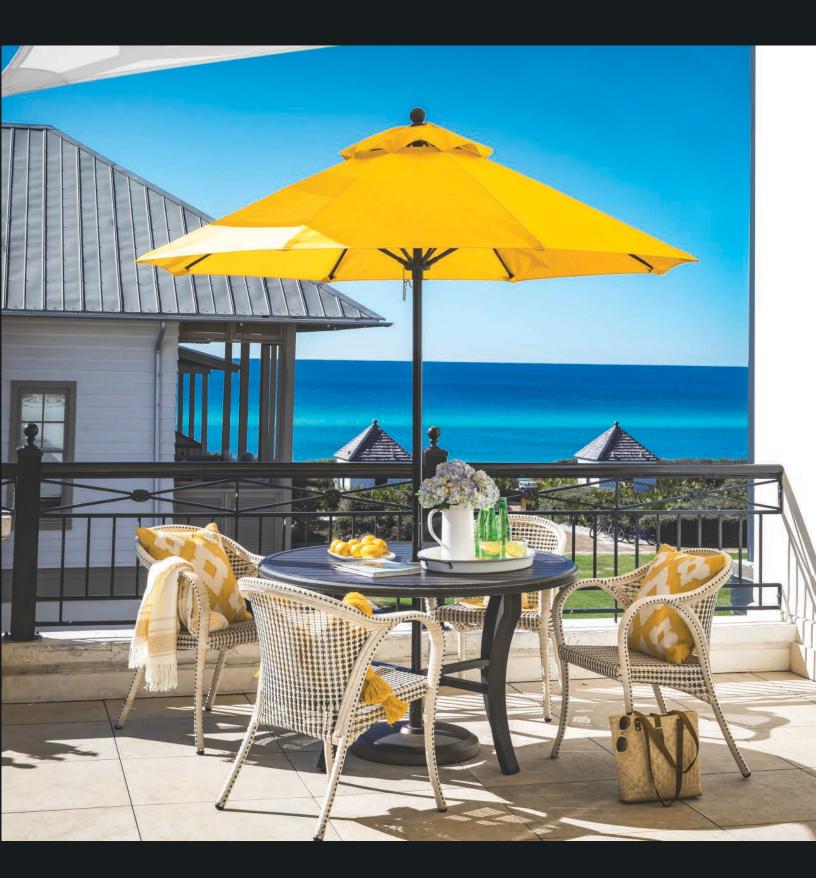

## **MONTEREY PULLEY LIFT FIBERGLASS MARKET**

9ft. Octagonal Fiberglass Market Umbrella • 1.5" Diameter Pole-Pulley Lift / **BK** - Onyx Powder Coat Finish **BF** - Classic Ball Finial

Recasens® R-554 Yellow (GRADE A) 9oz. Marine Grade Acrylic Fabric

Mounting: 100A-BZ+8ST - 100lbs. Premium Aluminum Shell Base - Desert Bronze + 8" Stainless Steel Stem









# ECLIPSE<sup>®</sup> DESIGNER CANTILEVER

13ft. Octagonal Designer Aluminum Cantilever Umbrella / **MS** - Brushed Silver Anodized Finish Recasens® R-099 White (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: **DP-SS** - Eclipse®/Aurora Specific Stainless Steel Surface Deck Plate



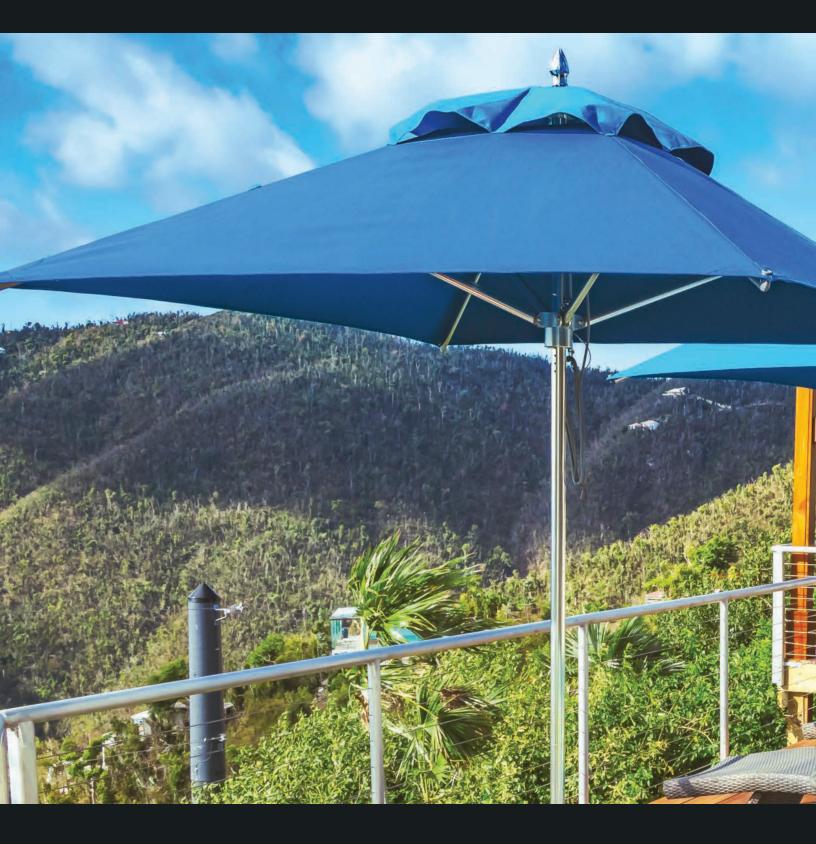

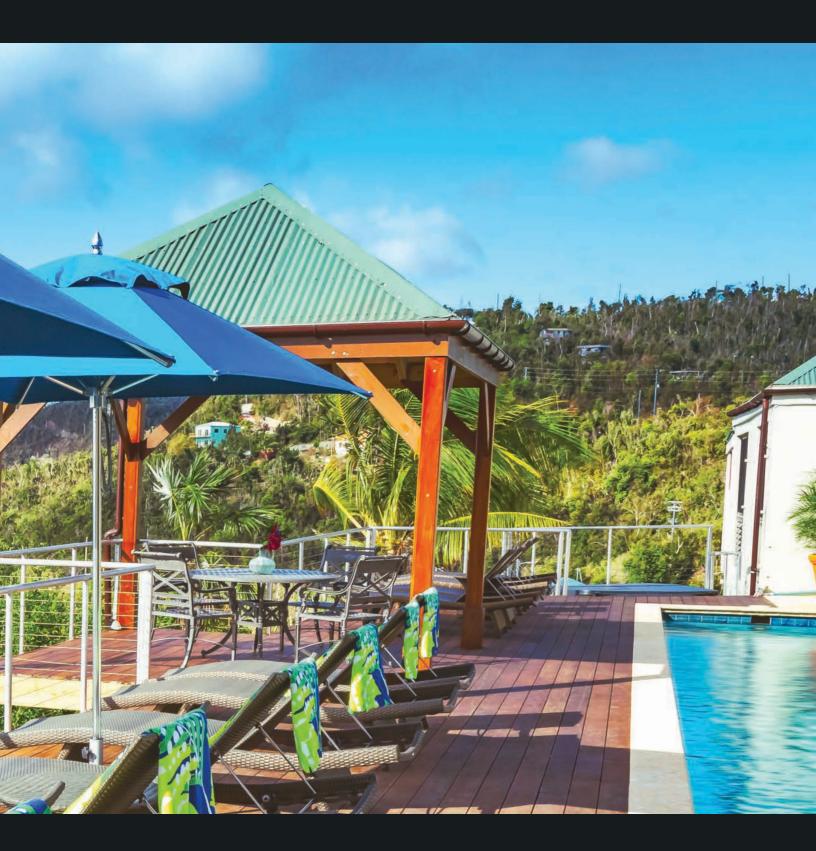

# **GREENWICH DESIGNER ALUMINUM MARKET**

6.5ft. x 6.5ft. Square Aluminum Market Umbrella • 1.5" Diameter Pole-Pulley Lift / SR - Platinum Silver Anodized Finish VF - Chrome Plated Vertex Finial

Recasens<sup>®</sup> R-172 Pacific Blue (**GRADE A**) 9oz. Marine Grade Acrylic Fabric

Mounting: 75S-SM - 75 lbs. Steel Plate Base w/Wheels in Silver Mist Powder Coat Finish





# P.01

ECLIPSE<sup>®</sup> **ECU** Designer Aluminum Cantilever

P.17 G-SERIES CAM Giant Aluminum Market

MONTEREY **FMC** Crank Lift Fiberglass Market

P.4.3 GRADE A+ Non-Stocking Recasens Fabrics

P.49 RESIN/ALU./STEEL Table and Free-Standing Bases

ATIVE

R55 AURORA **ARU/ARU-F** Specific Mounting Options P.05 AURORA **ARU** 

Premium Aluminum Cantilever

P.19 G-SERIES FM Giant Fiberglass Market

MONTEREY **FMA** Crank Auto Tilt Fiberglass Market

P.45 BASES / MOUNTS Base / Finishes Introduction

P.50 G-PLATES Galvanized Steel Plate Bases

P.56 NOVA NGU Specific Mounting Options P.09 AURORA **ARU-F** Premium Fiberglass Cantilever

P.21 GREENWICH CAM Designer Aluminum Market

R.39 RECASENS Recacril® Fabric Introduction

P.46 BASE GUIDE Base Recommendations

P.52 SPECIALTY MOUNTING Surface and In-Ground

P.57 G-SERIES CAM/FM Specific Mounting Options P.11 NOVA **NGU** Giant Telescoping Market

P.27 MONTEREY **FM** Pulley Lift Fiberglass Market


P.41 GRADE A Frankford Stock Fabrics

P.47 LED LIGHT/CLIPS Umbrella LEDs and Clips

P.54 ECLIPSE® **ECU** Specific Mounting Options

P.59 RESIDENTIAL Warranties and Disclaimers

P.61 COMMERCIAL Warranties and Disclaimers P.63 SHIPPING/RETURNS Procedures and Disclaimers P.64 CARE/MAINTENANCE General Maintenance/Fabric Care

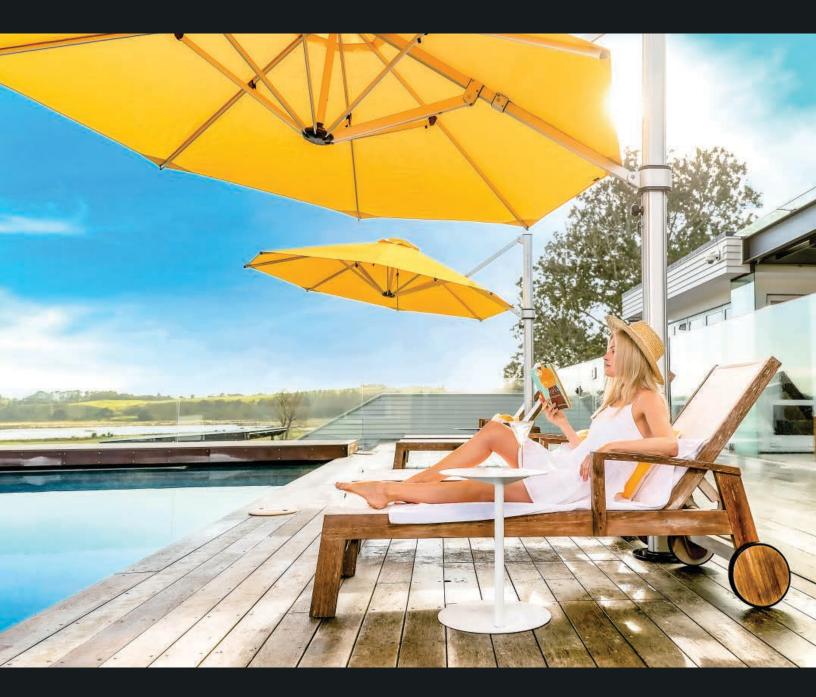


# ECLIPSE<sup>®</sup> DESIGNER CANTILEVER


13ft. Octagonal Designer Aluminum Cantilever Umbrella / MS - Brushed Silver Anodized Finish Recasens® R-554 Yellow (GRADE A) 9oz. Marine Grade Acrylic Fabric Mounting: DP-BK - Eclipse®/Aurora Specific Surface Deck Plate



# **ECLIPSE**<sup>®</sup> DESIGNER **ALUMINUM** CANTILEVER UMBRELLAS

This umbrella combines style with size, strength, and durability to provide a lasting solution to your shade needs. Its 360° rotation and Infinity Tilt allow for easy opening and closing while providing complete shade flexibility. Heavy-gauge extruded aluminum and stainless steel parts on a marine-grade, corrosion-resistant aluminum frame ensure the Eclipse® is ideal for both commercial and residential environments.

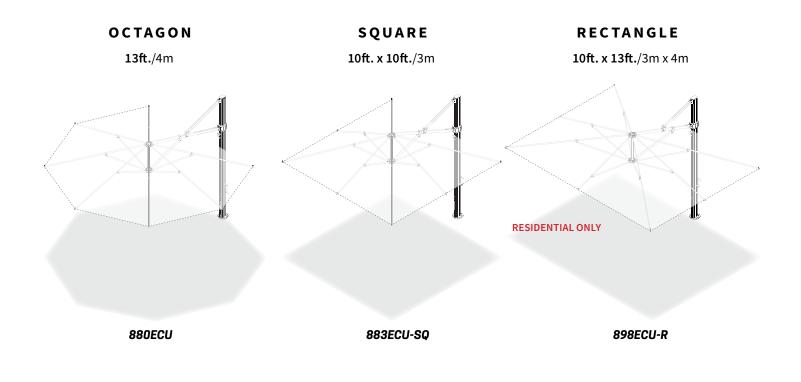





- Stainless steel hardware throughout.
- Wind Stabilizer Kit and Black Polyester Protective Cover Bag included.
- Mounting options include permanent, semi-• permanent, and free-standing bases for installation on any surface.
- Full 360° rotation combined with the Infinity Tilt provide ٠ countless hours of maximum shade.
- The crank lift is built for commercial use, yet designed for smooth and effortless operation in any environment.
- Manufactured with extruded aluminum.
- Engineered to withstand 35 mph sustained winds, +5 Wind Stabilization Kit
- 898ECU-R Engineered to withstand 15 mph sustained winds, +5 Wind Stabilization Kit



P.03

#### **ALUMINUM FRAME**

# 13ft./4m Octagon

# 10ft. x 10ft./3m Square

#### 880ECU

- A Mast Height: 110.6"/281cm
- B Open Hub Clearance: **81.3**"/206.5cm
- C Closed Clearance: 32"/81cm
- D Open Depth: 163"/414cm
- E Crank Clearance: 30"/76cm

Mast Diameter: **3.3 x 5"**/8 x 12.7cm Weight: **112 lbs.**/51 kg.

#### 883ECU-SQ

- A Mast Height: **110.6**"/281cm
- B Open Hub Clearance: 85"/216cm
- C Closed Clearance: **26.7**"/67.8cm
- D Open Depth: **133.75**"/339.8cm
- **E** Crank Clearance: **30**"/76cm

Mast Diameter: **3.3 x 5"**/8 x 12.7cm Weight: **108 lbs.** /49 kg.

# RESIDENTIAL ONLY

10ft. x 13ft./3m x 4m Rectangle

#### 898ECU-R

- A Mast Height: 110.6"/281cm
- B Open Hub Clearance: 84.2"/213.8cm
- C Closed Clearance: 12.9"/33cm
- D Open Depth: **130**"/330cm
- E Crank Clearance: 30"/76cm

Mast Diameter: **3.3 x 5"**/8 x 12.7cm Weight: **115 lbs.** / 52 kg.

Please see our "Umbrella Base Guide" on pg. 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

## ECLIPSE<sup>®</sup> SPECIFIC

#### **Mounting Options**

#### 40Gx3 Galvanized Steel Stack

- Weight: **555 lbs.**/252 kg.
- Dimensions: 40"/101cm 1.5"/3.8cm
- Free-Standing Use

#### NGU550 Galvanized Steel Max Base

- Weight: 550 lbs./249 kg.
- Dimensions: **45**"/114cm **5**"/12.7cm
- Powder Coated Aluminum Cover
- Free-Standing Use

#### **DP** Direct Surface Mounting Plate

- Weight: 12 lbs./5 kg.
- Dimensions: 12.5"/32cm .5"/12.7mm
- Free-Standing Surface Installation
- Stainless Steel Upgrade Available **DP-SS**

#### **36G-SQx3** Galvanized Plate Stack

- Weight: 600 lbs./272 kg.
- Dimensions: **36**"/91cm **1.5**"/3.8cm
- Free-Standing Use

#### SHIPS EMPTY

#### 480 Galvanized Steel Base

- Weight: **94 lbs.**/43 kg.
- Dimensions: 34"/86cm 11"/28cm
- Powder Coated Aluminum Cover
- Free-Standing Use RESIDENTIAL ONLY

#### IG In-Ground Mount

- Weight: **18 lbs.** /8.5 kg.
- Dimensions: 8.5"/21cm 14"/35cm
- Free-Standing In-Ground Installation

Please see pg. 54 for further details

#### 36G-SQx3+W Galvanized Steel Stack

- Weight: 614 lbs./279 kg.
- Dimensions: **36**"/91cm **6**"/15.2cm
- Free-Standing Use/+W

#### SHIPS EMPTY

**480** Galvanized Steel Base w/Wheels

- Weight: 80 lbs./36 kg.
- Dimensions: 34"/86cm 6.5"/16.5cm
- Powder Coated Aluminum Cover
- Free-Standing Use RESIDENTIAL ONLY




# AURORA PREMIUM ALUMINUM CANTILEVER


11ft. Octagonal Premium Aluminum Cantilever Umbrella / **MS** - Brushed Silver Anodized Finish Recasens® R-099 White (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: **XB+C** - Modular Cross Base w/ Cover (**MS** - Brushed Silver)



# **AURORA / AURORA-F** PREMIUM **ALUMINUM** AND **FIBERGLASS** CANTILEVER UMBRELLAS

Maximize your space without a traditional center post. The Aurora is manufactured using the most durable materials and fabric available to provide years of trouble-free use and enjoyment. Its Infinity Tilt allows you to change positions effortlessly. This modern cantilever is suitable for use in low to moderate wind conditions and ensures hours of protection from the sun and light rain.

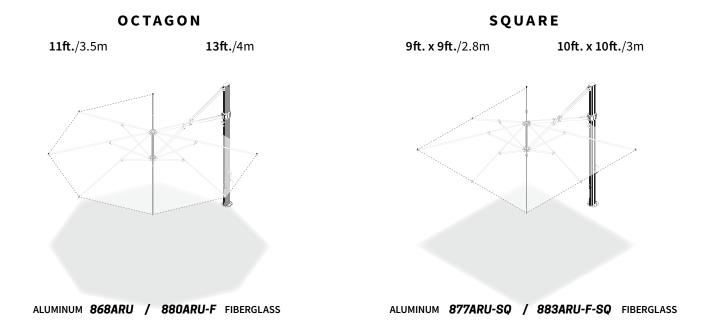



868ARU-MS-R164




- Stainless steel hardware throughout.
- Wind Stabilizer Kit and Black Polyester Protective Cover Bag included.
- Full 360° rotation combined with the Infinity Tilt provides countless hours of maximum shade.
- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- The crank lift is built for commercial use yet designed for smooth and effortless operation in any environment.
- Manufactured with extruded aluminum.
- Engineered to withstand sustained 25 mph winds, +5 Wind Stabilization Kit




#### **ALUMINUM FRAME**

#### 11ft./3.5m Oct.

9ft. x 9ft./2.8m Sq.





#### 868ARU

- Mast Height: 110.6"/281cm Α
- Open Hub Clearance: 81.3"/206.5cm В
- С Closed Clearance: 37"/93cm
- D Open Depth: 142"/361cm
- Ε Crank Clearance: 30"/76cm

Mast Diameter: 2.75 x 4"/7 x 10cm Weight: 95 lbs./43 kg.

#### Δ

877ARU-SQ

- Mast Height: 110.6"/281cm
- Open Hub Clearance: 82"/208cm B
- С Closed Clearance: 29"/73cm
- D Open Depth: 122"/310.7cm
- E Crank Clearance: 30"/76cm

Mast Diameter: 2.75 x 4"/7 x 10cm Weight: 90 lbs./40 kg.

Please see our "Umbrella Base Guide" on pg. 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

## AURORA SPECIFIC

#### **Mounting Options**

#### 40G+36G Galvanized Steel Stack

- Weight: 335 lbs./152 kg.
- Dimensions: 40"/101cm 1"/2.5cm
- Free-Standing Use

#### SHIPS EMPTY

#### 480 Galvanized Steel Base

- Weight: 80 lbs./36 kg.
- Dimensions: 34"/86cm 6.5"/16.5cm
- Powder Coated Aluminum Cover
- Free-Standing Use

#### SHIPS EMPTY

#### **XB+C** Modular Cross Base w/ Cover

- Weight: 38 lbs./17 kg.
- Dimensions: 40 /101cm .5"/12.7mm
- Powder Coated Aluminum Cover
- Free-Standing Use

#### 36G-SQx2 Galvanized Plate Stack

- Weight: 400 lbs./181 kg.
- Dimensions: 36"/91cm 1"/2.5cm
- Free-Standing Use

#### SHIPS EMPTY

**480** Galvanized Steel Base w/Wheels

- Weight: 94 lbs./43 kg.
- Dimensions: 34"/86cm 11"/28cm
- Powder Coated Aluminum Cover
- Free-Standing Use RESIDENTIAL ONLY

#### **DP** Direct Surface Mounting Plate

- Weight: **12 lbs.**/5 kg.
- Dimensions: 12.5"/32cm .5"/12.7mm
- Free-Standing Surface Installation
- Stainless Steel Upgrade Available DP-SS

Please see pg. 55 for further details

#### **36G-SQx2+W** Galvanized Steel Stack

- Weight: 414 lbs./188 kg.
- Dimensions: 36"/91cm 6"/ 15.2cm
- Free-Standing Use


#### SHIPS EMPTY

**XB** Modular Cross Base w/o Cover

- Weight: 36 lbs./16 kg.
- Dimensions: 39"/99cm 5"/12.7cm
- Free-Standing Use


#### IG In-Ground Mount

- Weight: 18 lbs./8.5 kg.
- Dimensions: 8.5"/21cm 14"/35cm
- Free-Standing In-Ground Installation





883ARU-F-SQ-MS-R164

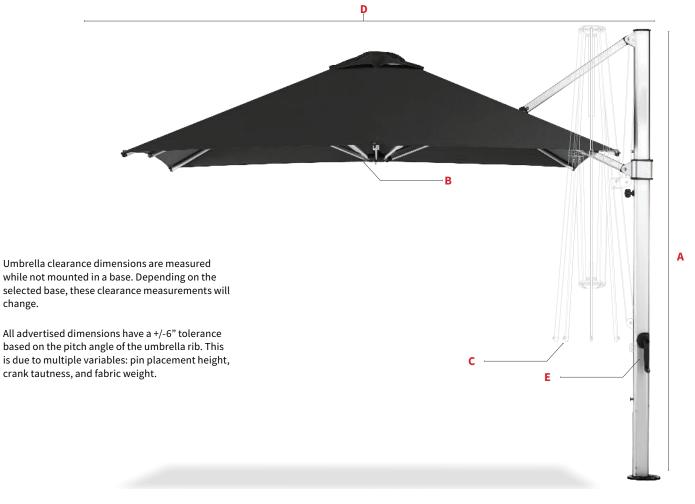

- Full 360° rotation combined with the Infinity Tilt ٠ provides countless hours of maximum shade.
- .75" (19mm) Diameter solid fiberglass ribs. •
- The crank lift is built for commercial use yet designed for • smooth and effortless operation in any environment.
- Manufactured with extruded aluminum. ٠

- Stainless steel hardware throughout.
- Black Polyester Protective Cover Bag included.
- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- Engineered to withstand sustained 30 mph winds



change.

#### **FIBERGLASS FRAME**

# 13ft./4m Octagon

# 10ft. x 10ft./3m Square

#### 880ARU-F

- A Mast Height: 110.6"/281cm
- B Open Hub Clearance: **81.3**"/206.5cm
- C Closed Clearance: **32**"/81cm
- D Open Depth: **159"**/403cm
- E Crank Clearance: **30**"/76cm

Mast Diameter: **2.75 x 4"**/7 x 10cm Weight: **132 lbs.**/60 kg.

#### A Mast Height: **110.6**"/281cm

883ARU-F-SQ

- B Open Hub Clearance: 85"/216cm
- C Closed Clearance: **26.7**" /67.8cm
- D Open Depth: **132**"/336cm
- E Crank Clearance: **30**"/76cm

Mast Diameter: **2.75 x 4"**/7 x 10cm Weight: **130 lbs.**/58 kg.

Please see our "Umbrella Base Guide" on pg. 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

## **AURORA-F SPECIFIC**

#### **Mounting Options**

#### 40G+36G Galvanized Steel Stack

- Weight: **335 lbs.**/152 kg.
- Dimensions: **40"**/101cm **1"**/2.5cm
- Free-Standing Use

#### SHIPS EMPTY

480 Galvanized Steel Base

- Weight: **80 lbs.**/36 kg.
- Dimensions: **34**"/86cm **6.5**"/16.5cm
- Powder Coated Aluminum Cover
- Free-Standing Use RESIDENTIAL ONLY

#### SHIPS EMPTY

#### **XB+C** Modular Cross Base w/ Cover

- Weight: **38 lbs.**/17 kg.
- Dimensions: **40** /101cm **.5**"/12.7mm
- Powder Coated Aluminum Cover
- Free-Standing Use

#### 36G-SQx2 Galvanized Plate Stack

- Weight: **400 lbs.**/181 kg.
- Dimensions: **36**"/91cm **1**"/2.5cm
- Free-Standing Use

#### SHIPS EMPTY

480 Galvanized Steel Base w/Wheels

- Weight: **94 lbs.**/43 kg.
- Dimensions: **34**"/86cm **11**"/28cm
- Powder Coated Aluminum Cover
- Free-Standing Use RESIDENTIAL ONLY

#### **DP** Direct Surface Mounting Plate

- Weight: **12 lbs.**/5 kg.
- Dimensions: **12.5**"/32cm **.5**"/12.7mm
- Free-Standing Surface Installation
- Stainless Steel Upgrade Available **DP-SS**

Please see pg. 55 for further details

#### 36G-SQx2+W Galvanized Steel Stack

- Weight: **414 lbs.**/188 kg.
- Dimensions: **36**"/91cm **6**"/15.2cm
- Free-Standing Use

#### SHIPS EMPTY

**XB** Modular Cross Base w/o Cover

- Weight: **36 lbs.**/16 kg.
- Dimensions: 39"/99cm 5"/12.7cm
- Free-Standing Use

#### IG In-Ground Mount

- Weight: **18 lbs.**/8.5 kg.
- Dimensions: **8.5**"/21cm **14**"/35cm
- Free-Standing In-Ground Installation



# **NOVA GIANT TELESCOPING MARKET**


13ft. x 13ft. Square Giant Telescoping Market Umbrella / **MS** - Brushed Silver Anodized Finish Recasens® R-176 Logo Red (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: **NGU-DP - Nova** Specific Surface Deck Plate




# **NOVA** GIANT **ALUMINUM** TELESCOPING MARKET UMBRELLAS

The Nova offers maximum shade and weather protection for commercial and residential environments. Its 9 oz. marine-grade acrylic canopy is supported by reinforced extruded aluminum ribs that connect to a 4-inch mast. The commercial-grade telescoping mechanism allows for effortless opening and closing of the umbrellas without having to move any furniture underneath.

The Nova is one of the only large shade structures in the industry with semi-permanent and non-permanent mounts available. This umbrella not only looks spectacular, but is a practical shade solution in a number of applications.

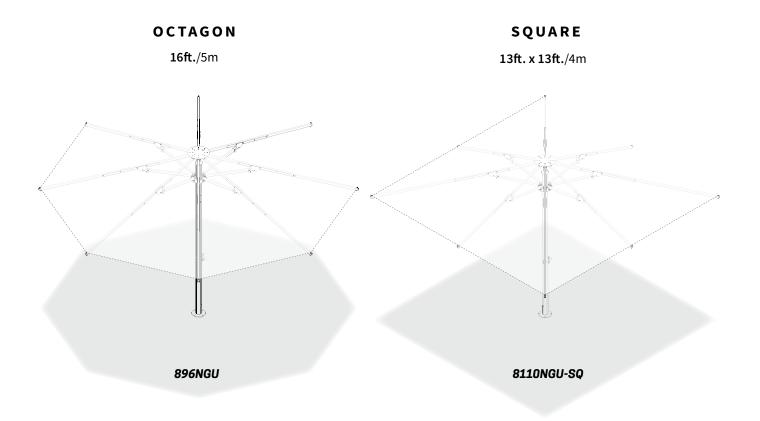

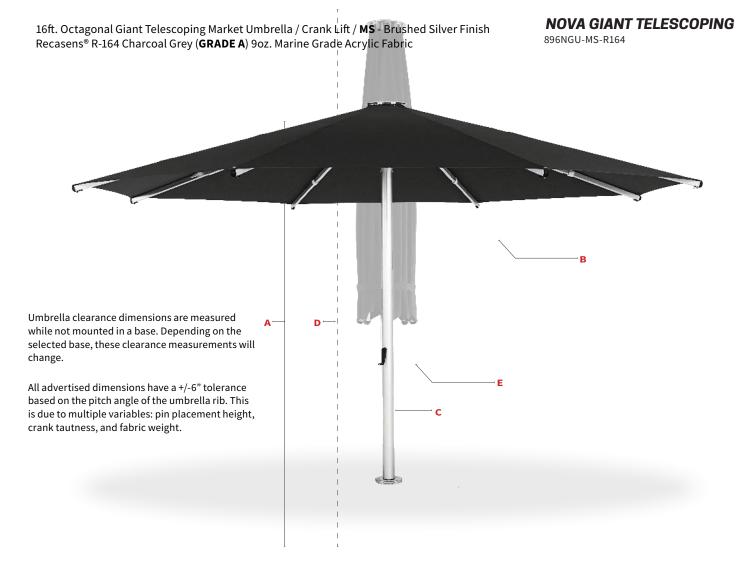


- As the telescoping Nova cranks down, the top portion of the mast rises, allowing you to completely close the umbrella without having to move any furniture.
- 4" diameter aluminum center pole with four internal strength channels, combined with the extruded aluminum ribs provide exceptional support and strength.
- Stainless steel hardware throughout.

- Reinforced grommets with an ultra-durable woven nylon wrap prevent fabric tearing from the frame.
- The Nova mounts to a hinged spigot allowing for the umbrella mast to be raised from a horizontal position.
- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- Engineered to withstand 50 mph sustained winds.



#### **ALUMINUM FRAME**

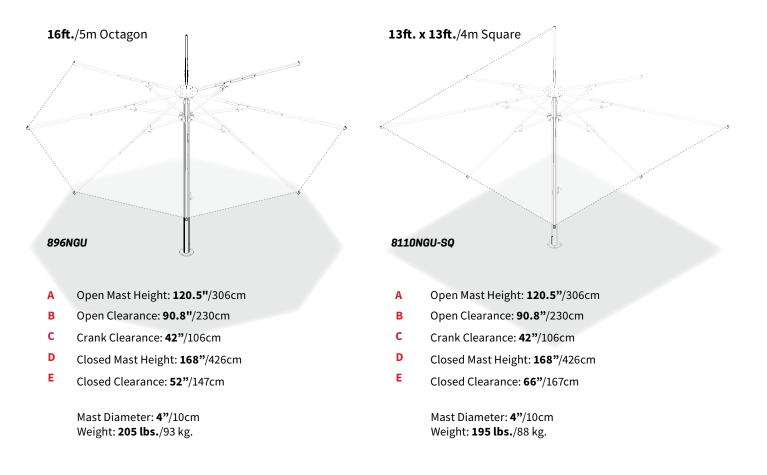

Please see our "Umbrella Base Guide" on pg. 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

## **NOVA SPECIFIC**

**Mounting Options** 

#### **NGU550** Galvanized Steel Max Base

- Weight: 550 lbs./249 kg.
- Dimensions: **45**"/114cm **5**"/12.7cm
- Powder Coated Aluminum Cover
- Free-Standing Use

- **NGU-DP** Direct Surface Mounting Plate
- Weight: **20 lbs.**/9 kg.
- Dimensions: **16**"/40cm **.5**"/12.7mm
- Free-Standing Use

Please see pg. 56 for further details

- IG In-Ground Mount
- Weight: **18 lbs.**/8.5 kg.
- Dimensions: 8.5"/ 21cm 14"/35cm
- Free-Standing In-Ground Installation



## **MONTEREY GIANT FIBERGLASS MARKET**

10ft. x 10ft. Square Giant Fiberglass Umbrella • 2" Diameter Pole-Pulley Lift / **SR** - Platinum Anodized Finish **VF** - Chrome Plated Vertex Finial Recasens® R-099 White (**GRADE A**) 9oz. Marine Grade Acrylic Fabric


Mounting: 36G+18ST-2 - 150lbs. 36" Round Galvanized Steel Plate + 18" Stainless Steel Stem





### FREE-STANDING MARKET UMBRELLAS

The G-Series is the flagship center post umbrella for all luxury resorts, hotels, and high-end outdoor living spaces. Built with the same commercial-quality materials as the Greenwich and Monterey, the G-Series offers free-standing maximum shade options on a larger 2" center post with three canopy size options. We offer permanent, semi-permanent, and free-standing base options to accommodate any outdoor space.

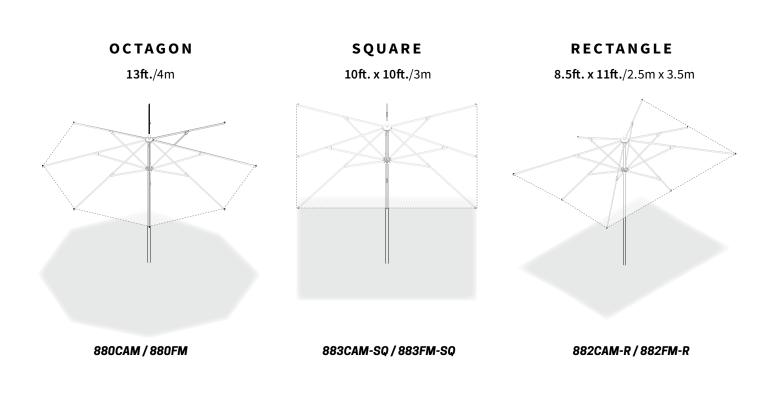




- Smooth and effortless kernmantle rope double pulley ٠ system.
- Ergonomically designed ribs maintain the shape and ٠ provide added strength.
- 2" diameter, 3.2mm thick single-piece aluminum center ٠ pole provides incredible strength and durability.
- Solid marine-grade, chrome-plated aluminum finial



- Stainless steel hardware throughout.
- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- Engineered to withstand 30 mph sustained winds.



#### **ALUMINUM FRAME**



Overall Height: 112.5"/285cm

Open Clearance: 83"/210cm


Mast Diameter: 2"/5cm Weight: 43 lbs./19.5 kg.

Closed Clearance: 30.5"/77cm

Α

В

С



#### 883CAM-SQ

- A Overall Height: 112.5"/ 285cm
- B Open Clearance: **86.3**"/ 219cm
- C Closed Clearance: 28"/ 70cm

Mast Diameter: **2"**/5cm Weight: **41 lbs.**/18 kg.

8.5ft. x 11ft./2.5m x 3.5m Rectangle

#### 882CAM-R

- A Overall Height: **112.5**"/285cm
- B Open Clearance: 88"/223cm
- C Closed Clearance: 27"/68cm

Mast Diameter: **2**"/5cm Weight: **42 lbs.**/19 kg.

Please see our "Umbrella Base Guide" on pg. 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

## **G-SERIES SPECIFIC**

#### **Mounting Options**

#### 40G+18ST2 Galvanized Plate

- Weight: **185 lbs.**/83 kg.
- Dimensions: **40"**/101cm **.5"**/12.7mm
- **18ST-2** Beauty Plate Included
- Free-Standing Use

#### 36G-SQ+W+18ST2 Galvanized Plate

- Weight: **214 lbs.**/97 kg.
- Dimensions: **36**"/91cm **4.5**"/11.4cm
- **18ST-2** Beauty Plate Included
- Free-Standing Use

#### 150A+18ST2 Premium Aluminum

- Weight: **150 lbs.**/68kg.
- Dimensions: **30**"/76cm **3.5**"/ 9cm
- Stem: (**18ST2**) **18**"/45cm **2**"/5cm
- Free-Standing Use

#### 36G+18ST2 Galvanized Plate

- Weight: **150 lbs.**/68 kg.
- Dimensions: **36**"/91cm **.5**"/12.7mm
- 18ST-2 Beauty Plate Included
- Free-Standing Use

#### SHIPS EMPTY

#### 480 Galvanized Steel Base

- Weight: 80 lbs./36 kg.
- Dimensions: 34"/86cm 6.5"/16.5cm
- 18ST-2 Beauty Plate Included
- Powder Coated Aluminum Cover
- Free-Standing Use

#### BZ2-SM In-Ground Mounting Stem

- Weight: **11 lbs.**/5 kg.
- Stem: 16"/40cm 2"/5cm
- In-Ground: 8.5"/21cm
- Free-Standing In-Ground Use

Please see pg. 57 for further details

#### 36G-SQ+18ST2 Galvanized Plate

- Weight: 200 lbs./90 kg.
- Dimensions: 36"/91cm .5"/12.7mm
- **18ST-2** Beauty Plate Included
- Free-Standing Use

#### SHIPS EMPTY

**480** Galvanized Steel Base w/Wheels

- Weight: **94 lbs.**/43 kg.
- Dimensions: **34**"/86cm **11**"/28cm
- **18ST-2** Beauty Plate Included
  - Powder Coated Aluminum Cover
  - Free-Standing Use

#### 38SAP-2 Soft Surface Anchor

- Weight: **4 lbs.**/1.8 kg.
- Dimensions: 38"/96cm
- 2"/5cm Diameter Umbrella
- Free-Standing In-Ground Use




- Smooth and effortless kernmantle rope double pulley system.
- .75" (19mm) Diameter fiberglass ribs.
- 2" diameter, 3.2mm thick single-piece aluminum center pole provides incredible strength and durability.
- Solid marine-grade, chrome-plated aluminum finial (Classic Ball default).

- Stainless steel hardware throughout.
- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- Engineered to withstand 35 mph sustained winds.



# FIBERGLASS FRAME

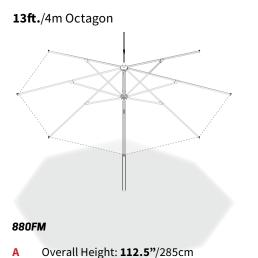



Open Clearance: 87"/221cm

Mast Diameter: 2"/5cm

Weight: 47 lbs./21 kg.

Closed Clearance: 30.5"/77cm






#### 883FM-SQ

- A Overall Height: 112.5"/285cm
- B Open Clearance: **85.5**"/216cm
- C Closed Clearance: 28"/70cm

Mast Diameter: **2**"/5cm Weight: **43 lbs.**/19.5 kg.



8.5ft. x 11ft./2.5m x 3.5m Rectangle

#### 882FM-R

- A Overall Height: **112.5**"/285cm
- B Open Clearance: **85.5**"/216cm
- C Closed Clearance: 27"/68cm

Mast Diameter: **2**"/5cm Weight: **44 lbs.**/20 kg.

Please see our "Umbrella Base Guide" on pg. 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

# **G-SERIES SPECIFIC**

# **Mounting Options**

В

С

# 40G+18ST2 Galvanized Plate

- Weight: **185 lbs.**/83 kg.
- Dimensions: **40"**/101cm **.5"**/12.7mm
- **18ST-2** Beauty Plate Included
- Free-Standing Use

# 36G-SQ+W+18ST2 Galvanized Plate

- Weight: **214 lbs.**/97 kg.
- Dimensions: **36**"/91cm **4.5**"/11.4cm
- **18ST-2** Beauty Plate Included
- Free-Standing Use

# 150A+18ST2 Premium Aluminum

- Weight: **150 lbs.**/68kg.
- Dimensions: **30**"/76cm **3.5**"/ 9cm
- Stem: (**18ST2**) **18**"/45cm **2**"/5cm
- Free-Standing Use

# **36G+18ST2** Galvanized Plate

- Weight: **150 lbs.**/68 kg.
- Dimensions: 36"/91cm .5"/12.7mm
- **18ST-2** Beauty Plate Included
- Free-Standing Use

#### SHIPS EMPTY

#### 480 Galvanized Steel Base

- Weight: 80 lbs./36 kg.
- Dimensions: 34"/86cm 6.5"/16.5cm
- **18ST-2** Beauty Plate Included
- Powder Coated Aluminum Cover
- Free-Standing Use

# BZ2-SM In-Ground Mounting Stem

- Weight: **11 lbs.**/5 kg.
- Stem: 16"/40cm 2"/5cm
- In-Ground: 8.5"/21cm
- Free-Standing In-Ground Use

Please see pg. 57 for further details

# 36G-SQ+18ST2 Galvanized Plate

- Weight: 200 lbs./90 kg.
- Dimensions: 36"/91cm .5"/12.7mm
- 18ST-2 Beauty Plate Included
- Free-Standing Use/**+W**

#### SHIPS EMPTY

**480** Galvanized Steel Base w/Wheels

- Weight: **94 lbs.**/43 kg.
- Dimensions: **34**"/86cm **11**"/28cm
- **18ST-2** Beauty Plate Included
  - Powder Coated Aluminum Cover
  - Free-Standing Use

### 38SAP-2 Soft Surface Anchor

- Weight: **4 lbs.**/1.8 kg.
- Dimensions: 38"/96cm
- 2"/5cm Diameter Umbrella
- Free-Standing In-Ground Use



# **GREENWICH DESIGNER ALUMINUM MARKET**


6.5ft. x 6.5ft. Square Aluminum Market Umbrella • 1.5" Diameter Pole-Pulley Lift / **SR** - Platinum Anodized Finish **VF** - Chrome Plated Vertex Finial Recasens® R-172 Pacific Blue (**GRADE A**) 9oz. Marine Grade Acrylic Fabric

Mounting: 75S-SM - 75 lbs. Steel Plate Base w/Wheels in Silver Mist Powder Coat Finish



# **GREENVICH** DESIGNER **ALUMINUM** MARKET UMBRELLAS


This designer umbrella combines luxury with style to create a sophisticated look in any outdoor environment. Available in five sizes, there are options for any space and shade need. The easy-glide pulley system allows for effortless opening and closing. Its sturdy aluminum frame, polished silver finish, and solid marine-grade, chrome-plated aluminum finial add the perfect touch to give your cherished outdoor space the enhanced appearance found at luxury resorts, hotels, and restaurants.

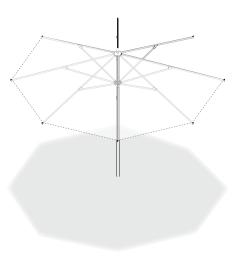

OCTAGON

7.5ft./2.3m • 9ft./2.7m • 11ft./3.5m

**SQUARE** 6.5ft. x 6.5ft./2m • 7.5ft. x 7.5ft./2.3m



# 845CAM / 854CAM / 864CAM

454CAM-SQ / 864CAM-SQ

Umbrella clearance dimensions are measured while not mounted in a base. Depending on the selected base, these clearance measurements will change.

All advertised dimensions have a +/-6" tolerance based on the pitch angle of the umbrella rib. This is due to multiple variables: pin placement height, crank tautness, and fabric weight.

- Smooth and effortless kernmantle rope pulley system. ٠
- Ergonomically designed ribs maintain the shape and • provide added strength.
- 1.5" diameter 2.3mm thick two-piece aluminum center • pole provides incredible strength and durability.
- Solid marine-grade, chrome-plated aluminum finial • (Vertex default).

- Stainless steel hardware throughout.
- Mounting options include permanent, semi-permanent, ٠ and free-standing bases for installation on any surface.
- Engineered to withstand 30 mph sustained winds.





# **ALUMINUM FRAME**

# 7.5ft./2.3m Octagon

Overall Height: 94"/238cm


Open Clearance: 70"/177cm

Closed Clearance: 44"/111cm

Mast Diameter: 1.5"/3.8cm

Weight: **20 lbs.**/9 kg.

# 9ft./2.7m Octagon




#### 854CAM

- A Overall Height: **102**"/259cm
- B Open Clearance: **76**"/193cm
- C Closed Clearance: 42"/106cm

Mast Diameter: **1.5"**/3.8cm Weight: **22 lbs.**/10 kg.


# 11ft./3.5m Octagon



- A Overall Height: 108"/274cm
- B Open Clearance: 82"/208cm
- C Closed Clearance: 40"/101cm

Mast Diameter: **1.5**"/3.8cm Weight: **26 lbs.**/12 kg.

# 6.5ft. x 6.5ft./2m Square



#### 454CAM-SQ

845CAM


Α

В

С

- A Overall Height: **102**"/259cm
- B Open Clearance: **76**"/193cm
- C Closed Clearance: 42"/106cm

Mast Diameter: **1.5**"/3.8cm Weight: **18 lbs.**/8.5 kg.




#### 864CAM-SQ

- A Overall Height: 108"/274cm
- B Open Clearance: 82"/208cm
- C Closed Clearance: 40"/101cm

Mast Diameter: **1.5**"/3.8cm Weight: **24 lbs.**/11 kg.

Please see our "Umbrella Base Guide by Application" on page 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

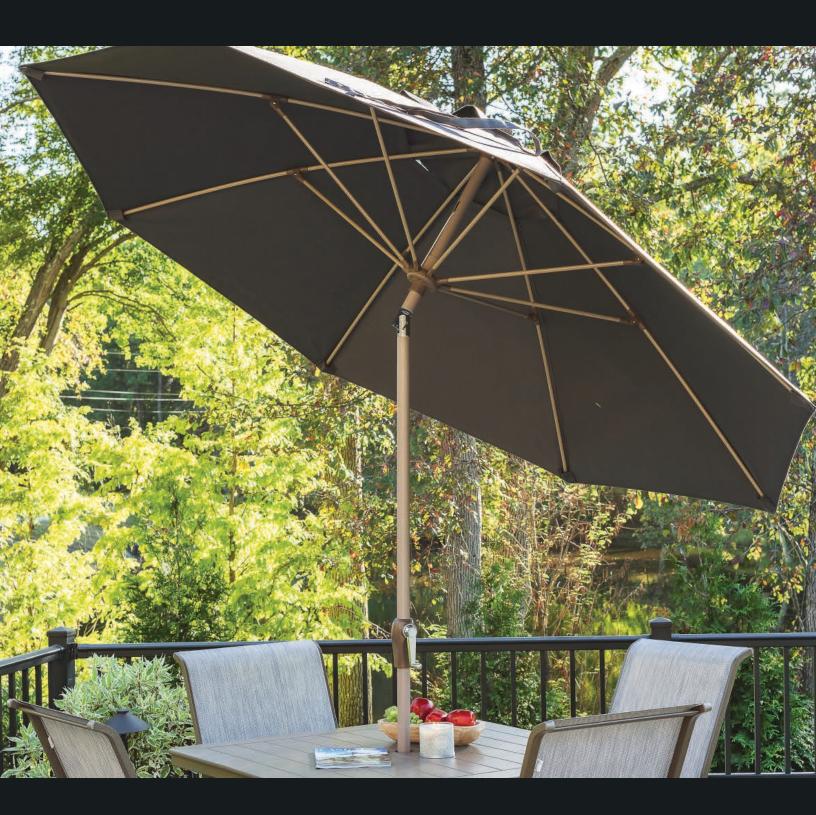

# **MONTEREY AUTO TILT FIBERGLASS MARKET**

9ft. Octagonal Fiberglass Market Umbrella • 1.5" Diameter Pole-Crank Auto Tilt / **HW** - Heather Willow Powder Coat **BF** - Classic Ball Finial Recasens<sup>®</sup> R- 164 Charcoal Grey (**GRADE A**) 9oz. Marine Grade Acrylic Fabric


Mounting: **24G-SQ+8ST** - 24" Galvanized Square Plate Base/ 8" x 1.5" Stainless Steel Stem



# **MONTEREY** COMPLETE **FIBERGLASS** MARKET UMBRELLA COLLECTION

The Monterey fiberglass market umbrella collection is manufactured using the best and most resilient materials available. The half-inch thick fiberglass ribs allow the frame to bend and flex easily in windy conditions, while the durable aluminum center pole, maintenance-free resin, and Stainless steel parts ensure this umbrella will provide years of worry-free shade. Available in six sizes and eight beautiful frame finishes, the Monterey is designed to allow you to bring commercial durability home to your cherished outdoor living space.


- FM: High Strength Woven Kernmantle Rope Pulley Lift System
- FMC: Sturdy And Robust Crank Lift Without Tilt
- FMA: Industry-Best Crank Lift And Auto Tilt

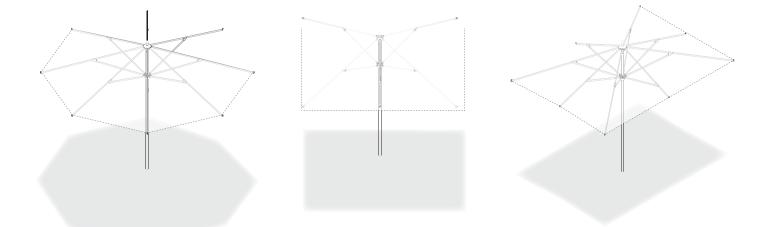




# PULLEY LIFT **FIBERGLASS** MARKET UMBRELLAS

Our easy-glide pulley system is supported by a high strength woven kernmantle rope which allows you to effortlessly open and close the umbrella. All of our pulley lift umbrellas are designed with a hook pin to keep the pulley cord out of reach and out of sight.

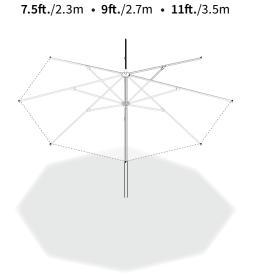

OCTAGON

**SQUARE** 6.5ft. x 6.5ft./2m • 7.5ft. x 7.5ft./2.3m



845FM / 854FM / 864FM

454FM-SQ / 464FM-SQ



- Smooth and effortless kernmantle rope pulley system.
- 1/2" fiberglass ribs and struts for maximum strength and flexibility.
- 1.5" diameter center pole with a 1/8" aluminum wall thickness provides incredible strength and durability.
- 4-layer fabric protection and closed-stitching pocket.

- Solid TPU Copolymer finial design (Classic Ball default).
- Stainless steel hardware throughout.
- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- Engineered to withstand 40 mph sustained winds.



# Frame Finishes

# **FIBERGLASS FRAME**

# 7.5ft./2.3m Octagon

Overall Height: 94"/238cm

Open Clearance: 76"/193cm

Closed Clearance: 44"/111cm

Mast Diameter: 1.5"/3.8cm

Weight: 16 lbs./7 kg.


# 9ft./2.7m Octagon

#### 854FM

- A Overall Height: **97"**/246cm
- B Open Clearance: **77**"/195cm
- C Closed Clearance: 41"/104cm

Mast Diameter: **1.5**"/3.8cm Weight: **18 lbs.**/8.5 kg.


#### 11ft./3.5m Octagon



- B Open Clearance: 82"/208cm
- C Closed Clearance: **39"**/99cm

Mast Diameter: **1.5**"/3.8cm Weight: **22 lbs.** /10 kg.

# 6.5ft. x 6.5ft./2m Square



#### 454FM-SQ

845FM


Α

В

С

- A Overall Height: 97"/246cm
- B Open Clearance: 77"/195cm
- C Closed Clearance: 41"/104cm

Mast Diameter: **1.5**"/3.8cm Weight: **16 lbs.**/7 kg.



#### 464FM-SQ

- A Overall Height: **107"**/271cm
- B Open Clearance: 82"/208cm
- C Closed Clearance: 39"/99cm


Mast Diameter: **1.5**"/3.8cm Weight: **17 lbs.**/8 kg.

Please see our "Umbrella Base Guide by Application" on page 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).




# CRANK LIFT - NO TILT FIBERGLASS MARKET UMBRELLAS

Designed with a stainless steel handle, durable parachute cord, and Frankford's exclusive commercial-grade crank system, this umbrella is truly unique. The Monterey is designed to last and will give your outdoor space a refined, elegant look for years to come.

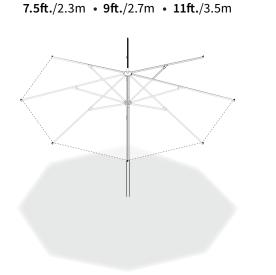

OCTAGON

**SQUARE** 6.5ft. x 6.5ft./2m • 7.5ft. x 7.5ft./2.3m



845FMC / 854FMC / 864FMC

454FMC-SQ / 464FMC-SQ

A sured gon the ments will c

Umbrella clearance dimensions are measured while not mounted in a base. Depending on the selected base, these clearance measurements will change.

All advertised dimensions have a +/-6" tolerance based on the pitch angle of the umbrella rib. This is due to multiple variables: pin placement height, crank tautness, and fabric weight.

- 316L Stainless steel crank handle and axle.
- 1/2" fiberglass ribs and struts for maximum strength and flexibility.
- 1.5" diameter center pole with a 1/8" aluminum wall thickness provides incredible strength and durability.
- 4-layer fabric protection and closed-stitching pocket.

Solid TPU Copolymer finial design (Classic Ball default).

**BALL FINIAL** 

BF

• Stainless steel hardware throughout.

DEFAULT

- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- Engineered to withstand 40 mph sustained winds.







# **FIBERGLASS FRAME**

# 7.5ft./2.3m Octagon

#### 845FMC

- A Overall Height: 98"/248cm
- B Open Clearance: 72"/182cm
- C Closed Clearance: 49"/124cm
- D Crank Clearance: **36**"/91cm

Mast Diameter: **1.5"**/3.8cm Weight: **18 lbs.**/8.5 kg.


# 9ft./2.7m Octagon

### 854FMC

- A Overall Height: **107''**/271cm
- B Open Clearance: **79**"/200cm
- C Closed Clearance: 48"/121cm
- D Crank Clearance: 36"/ 91cm

Mast Diameter: **1.5**"/3.8cm Weight: **20 lbs.**/9 kg.


# 6.5ft. x 6.5ft./2m Square



#### 454FMC-SQ

- A Overall Height: **107**"/271cm
- B Open Clearance: **79**"/200cm
- C Closed Clearance: **48**"/121cm
- D Crank Clearance: **36**"/91cm

Mast Diameter: **1.5**"/3.8cm Weight: **18 lbs.**/8.5 kg.




#### 464FMC-SQ

- A Overall Height: **107**"/271cm
- B Open Clearance: 87"/221cm
- C Closed Clearance: 41"/104cm
- D Crank Clearance: **36**"/91cm

Mast Diameter: **1.5"**/3.8cm Weight: **21 lbs.**/9.5 kg.

Please see our "Umbrella Base Guide by Application" on page 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).



#### 64FMC


- A Overall Height: **107"**/271cm
- B Open Clearance: 87"/221cm
- C Closed Clearance: 41"/104cm
- D Crank Clearance: **36"**/91cm
  - Mast Diameter: **1.5"**/3.8cm Weight: **24 lbs.**/11 kg.



# CRANK LIFT - AUTO TILT **FIBERGLASS** MARKET UMBRELLAS

The Monterey Crank Auto Tilt is an industry favorite with a 30° tilt, this umbrella guarantees shade at any time of the day.


Made of zinc alloy providing exceptional strength, the auto tilt is capable of handling larger canopies and higher winds.

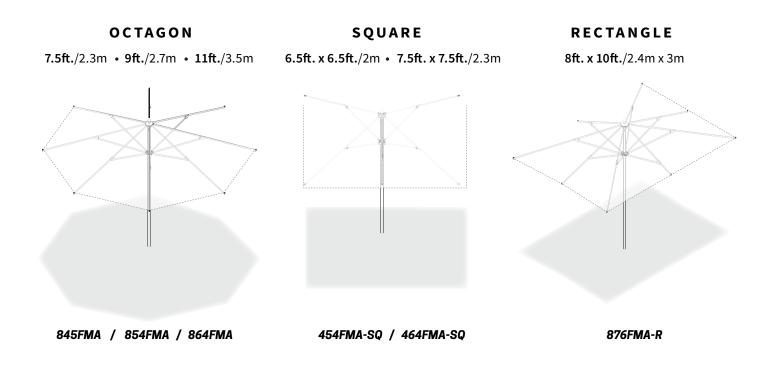

B

**MONTEREY-FMA** 864FMA-SR-R164





All advertised dimensions have a +/-6" tolerance based on the pitch angle of the umbrella rib. This is due to multiple variables: pin placement height, crank tautness, and fabric weight.

- Stainless steel Crank Handle and axle.
- Commercial rated chrome plated zinc alloy auto tilt
- 1/2" fiberglass ribs and struts for maximum strength and flexibility.
- 1.5" diameter center pole with a 1/8" aluminum wall thickness provides incredible strength and durability.
- 4-layer fabric protection and closed-stitching pocket.

Solid TPU Copolymer finial design (Classic Ball default).

BALL FINIAL

BF

• Stainless steel hardware throughout.

DEFAULT

С


D

- Mounting options include permanent, semi-permanent, and free-standing bases for installation on any surface.
- Engineered to withstand 40 mph sustained winds.
- 876FMA Engineered to withstand 25 mph sustained winds.





# **FIBERGLASS FRAME**

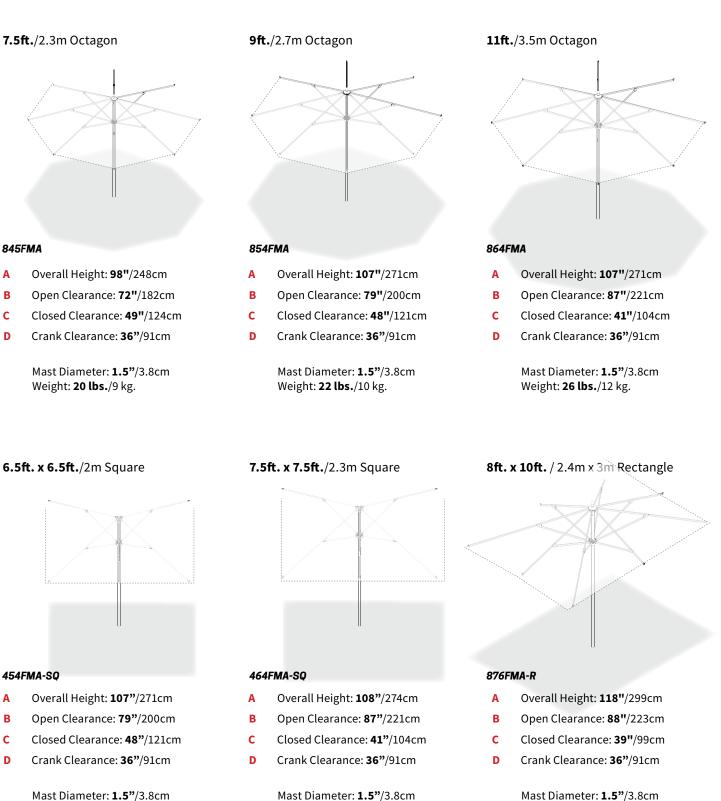

Weight: 24 lbs./11 kg.

Mast Diameter: **1.5"**/3.8cm Weight: **28 lbs.** /12.7 kg.

Please see our "Umbrella Base Guide by Application" on page 46 for recommended base options, based on the umbrella size and desired application (table use or free-standing).

Weight: 20 lbs./9 kg.

# RECASENS BCN **n** 1886

# We're woven differently

# The Recacrif Solution Dying Process



# FIBER

Color pigments are applied to the polymer before the fiber is extruded. Therefore, the color is intrinsic; it is in the core of the fiber. YARN

During the warping and spinning process, the fiber is transformed into Recacril<sup>®</sup> yarn that is fully dyed. The color does not just remain on the surface, but it is consistent right from the heart of the yarn.

FABRIC

As a result, Recasens' 100% solution-dyed acrylic fabrics have exceptional color retention as well as excellent technical properties and UV and weather resistance.

Solid fabrics have been tested independently in certified labs and found that all colors have a UPF rating of 50+, and most colors have a shade factor of at least 98%.



# **Technical Specifications**

# Characteristics

Weight Finish Styles 9 oz. +/- 5% Fluorocarbon / Resin 81 solids / 73 stripes

# Specifications

UV Resistance Abrasion Rating Hydrostatic Puncture Strength

Tear Strength Tensile Strength Shrinkage Stretch

# **Test Results**

1,500 + hours 40,000 rubs 40cm 38 lbs.

# Warp/Weft

11.5 lbs. / 7.7 lbs. 287 lbs. / 149 lbs. 0.10% / 0% 0% / 0%



100% Solution-Dyed Acrylic Fibers



# **Test Method**

AATCC-16 ASTM-4157 AATCC-127 Method B ASTM-751

ASTM D-2261 ASTM D-5034 Grab Method 5804 ASTM D-2594



# GRADES A/A+

The Recacril<sup>®</sup> and RECsystem<sup>®</sup> canvases are treated with a special technological process to ensure the lasting quality of the fabric. In this process, nanoparticles completely cover the surface of the fibers in the fabric, forming a permanent coat. After treatment, both the surface and the inside of the fabric are permanently protected against dirt buildup and adverse effects of a wide variety of atmospheric agents. The Infinity treatment's low reactivity and high stability endow long-term protection to the fabric, especially against mildew, and provide excellent water and oil repellency.

Frankford uses only the best. Coats Dabond is a bonded, 250D x 3 ply twisted continuous filament polyester thread that offers excellent protection against UV light and abrasion. It is specifically designed to withstand demanding weather conditions. Dabond is the only environmentally friendly bonded polyester thread available on the market and is excellent at resisting mildew, rot, and the effects of bleaching.

- Tighter weave
- Superior stability
- Unsurpassed fade resistance

- Proprietary Infinity finishing Process
- Long-lasting water resistance
- Stain resistance

Stripes in all fabric grades cannot be used on rectangular canopies.



Frankford Umbrellas stands behind our marine-grade fabrics with our industry-leading commercial and residential warranties.

For full fabric offering, care and cleaning recommendations, and further warranty information, visit **frankfordumbrellas.com** 

EXCLUSIVE U.S. FABRICS For a full offering of fabrics, please visit frankfordumbrellas.com



# GRADE A

**Comparison Fabrics Chart** 

Sunbrella<sup>®</sup> and Outdura fabrics may not be an exact match to our stock Recacril<sup>®</sup> Marine-grade acrylic fabrics. Production shades may vary.

# sunbrella<sup>®</sup>

# 



	and the second	-		200		
4646/5439/6046	Captain Navy ┥	• R-1	175 Captain Navy	•	Captain's Navy	6003
4601/5401/6001	Pacific Blue ┥	• R-1	L72 Pacific Blue	•	Pacific Blue	6002
4675/5426/6075	Capri ┥	• R-1	L69 Steel Blue			
		R-2	229 Sapphire			
4612/5416	Aruba 🔶	• R-1	171 Turquoise	•	→ Aruba	6072
		R-1	L60 Pistachio			
4637/5446/6037	Forest Green 🔸	• R-1	LO2 Forest Green	•		6001
4631/5436/6031	Burgundy ┥	• R-1	177 Burgundy	•	Burgundy	6004
4603/5403/6003	Jockey Red 🔸	• R-1	L82 Vermillion	•	→ China Red	6010
4666/5477/6066	Logo Red ┥	• R-1	L76 Logo Red	•	→ Cardinal Red	6021
		R-1	LO5 Salmon			
4622/5440	Terracotta ┥	• R-1	LO4 Chestnut	•	→ Terracotta	6035
4609	Orange ┥	• R-!	567 Orange	•	→ Tangerine	6062
4677/5417	Tuscan ┥	• R-1	L85 Pumpkin			
<b>4602/5457</b> Sι	unflowerYellow 🔸	• R-!	554 Yellow	•	→ Dandelion	6023
4621/6021	True Brown 🔸	• R-1	L56 Brown	•	—► Kona	6056
4628/5468/6028	Toast ┥	• R-1	LOO Beige	•	→ Linen	6025
4633/5422/6033	Linen 🔶	• R-1	L26 Linen	•	Antique Beige	6006
4604/5404/6004	Natural ┥	• R-0	099 White	•	→ Natural White	6009
4630/6030	Cadet Grey ┥	• R-1	L38 Cadet Grey	•	Cadet Grey	6008
		R-1	196 Titanium			
		R-1	L64 Charcoal Grey	•	→ Storm Grey	6061
4608/5408/6008	Black ┥	• R-1	LO3 Black	•	→ Black	6005

G R	R A	DΕ	A-	ŀ	
Non	-Sto	ockir	ng R	ecacr	il®

A GRADE A+ GRADE **SOLIDS** 

© COMPARISON

BLUE
CDEEN

# 

A+	•		Manhattan	A+	<u>so</u>	R-193	Light Blue	A+		R-355	Daró
A+		R-052	Brooklyn	A+	ෙම	R-194	Ash	A+		R-356	Rupit
A+	•	R-054	Queens	A+	<u></u>	R-195	Cacao	A+		R-362	Menor
A+	•	R-060	Bronx	A+	<u>_</u>	R-197	Lead Tweed	A+		R-363	Congost
A+	•	R-061	Grey Stripe	A+	ො	R-198	Nickel	A+	•	R-365	Freser
A+	•	R-063	Bayside	A+	<u></u>	R-199	Atlantic Blue	A+	•	R-411	Montornés
A+	•	R-086	Concord	A+	<u></u>	R-217	lvory	A+		R-412	Motril
A+	•	R-089	Glendale	A+	Ś	R-220	Argent	A+	<u></u>	R-415	Marble
A+	•	R-094	Prati	A+	<u></u>	R-222	Oak Buff	A+	•	R-416	Nerja
A+		R-097	Trastévere	A+	<u>®</u>	R-224	Dun Grey	A+	•	R-419	Ronda
A+		R-098	Trevi	A+	()	R-232	Denim	A+	•	R-422	Mojacar
A+	<u>©</u>	R-101	Mandarin	A+		R-236	Jeans	A+	<u> </u>	R-423	Cambrils
A+	<b>®</b>	R-106	Flamingo	A+	<u>©</u>	R-237	Pineapple	A+		R-425	Luarca
A+	()	R-107	Champagne	A+	()	R-239	Yellow Tweed	A+	•	R-428	Gandia
A+	00	R-108	Vanilla	A+	<b>(</b> )	R-240	Honey	A+		R-430	Bará
A+	© ©		Lilly	A+	©®	R-241 R-243	Phoenix	A+		R-434	Dalias
A+ A+	99 199	R-111 R-112		A+ A+	©®	R-243 R-244	Tapenade Dun	A+ A+		R-437 R-445	Doñana
A+ A+	9 9	R-112 R-112	Graphite	A+ A+	<u>60</u>	R-244 R-245	Navia	A+ A+		R-445 R-447	Tona Reus
A+ A+	09 0	R-112 R-114	Cava Pearl	A+ A+		R-245 R-247	Manacor	A+ A+		R-447 R-465	Grecia
A+	©©	R-114 R-115	Cream	A+	®	R-247 R-248	Hunter	A+	ĕ	R-405 R-701	Yecla
A+	0	R-115 R-117	Raw	A+		R-278	Westminster	A+		R-701	Xátiva
A+	90 190		Duna	A+	ĕ	R-280	Midwood	A+		R-707	Aridane
A+	9 10		Wheat	A+	ŏ	R-282	Pelham	A+	ŏ	R-720	Mijas
A+	) (50)	R-122	Seashell	A+	6	R-292	Teal	A+	ŏ	R-723	Javea
A+	1900 1900	R-123	Argenta Grey	A+	 ®	R-293	Argent Tweed	A+	ŏ	R-747	Begur
A+	େଇଁ		Moonrock	A+	<u>6</u>	R-294	Ice Tweed	A+	6	R-769	Baltic Tweed
A+	 ©		Cinnamon	A+	©	R-295	Honey Tweed	A+	©.®	R-770	Charcoal Tweed
A+	©®		Heather Beige	A+	<u>so</u>	R-296	Lagoon	A+	େ୭୭	R-772	Blue Tweed
A+	©®	R-142	Emerald	A+	<u>so</u>	R-297	Brunette	A+	<u>so</u>	R-774	Smoke Tweed
A+	©®	R-143	Hemp Beige	A+	<u>so</u>	R-298	Coal	A+	©99	R-775	Linen Tweed
A+	•	R-144	Maella	A+	\$0	R-300	Oat	A+	<u>so</u>	<b>R-776</b>	Taupe Tweed
A+	<u></u>	R-145	Tenerife	A+	<u></u>	R-312	Iguana Tweed	A+	<u>60</u>	R-779	Beige Tweed
A+	<u></u>	R-148	Desert	A+	<u>so</u>	R-314	Maple	A+	<u>so</u>	R-791	Beige Slub Tweed
A+	<u></u>	R-149	Corn	A+	<b>SO</b>	R-317	Beech	A+	60	R-792	Taupe Slub Tweed
A+		R-150	Dark Grey	A+	•	R-321	Gracia	A+	<u></u>	R-793	Linen Slub Tweed
A+	90 90	R-152	Taupe	A+	•	R-322	Bonanova	A+	100	R-794	Sand Slub Tweed
A+	<u>60</u>	R-161	Grey	A+	•	R-323	Born	A+		R-804	Mérida
A+	00	R-162	Khaki	A+	•	R-324	Valls	A+		R-806	Arucas
A+	<u>60</u>	R-163	Green	A+		R-325	Aviá	A+		R-808	Orotava
A+	<u>60</u>	R-165	Mauve	A+		R-326	Cercs Móstolos	A+		R-812	Inca Brada
A+		R-166	Foix	A+		R-327 R-328	Móstoles	A+		R-843	Breda
A+	0	R-167	Tarifa	A+		R-328 R-343	Sants	A+		R-854 R-855	Jumilla
A+	00		Admiral Blue	A+ A+		R-343 R-345	Tormes	A+		R-855 R-874	Torcal
A+ A+	®	R-173 R-174	Dark Blue	A+ A+		R-345 R-346	Odiel Tambre	A+ A+		R-874 R-876	Llivia Galdana
A+ A+	89 89	R-174 R-178	Navy Blue	A+ A+		R-346 R-348	Ulla	A+ A+	6	R-876 R-911	Baltic
A+ A+	6	R-178 R-180	Toast Sand	A+ A+		R-348 R-349	Cabriel	A+ A+		R-911 R-960	Almenara
A+ A+	89 80		Coffee	A+ A+		R-349 R-350	Sella	A+ A+	ŏ	R-960 R-969	Valdespina
A+	© ©	R-181	Silver	A+	ĕ	R-350 R-351	Arga	A+	ŏ	R-969 R-971	Trujillo
A+	0	R-187	Jade	A+	ŏ	R-351	Segre	A.		K-511	najillo
A+	 ©		Lemon	A+	ĕ	R-352	Muga				
		N 100	Lemon				mugu				

Stripe fabrics can only be sewn horizontally. Stripe fabrics cannot be sewn vertically or used on rectangular canopies.

Geometric, Floral, Paisley, Novelty, Plaids, Animal Print, Chevrons, or Abstract patterns cannot be sewn in a continuous repeat. A new repeat will begin on each adjacent panel.

All stripe patterns in GRADE A+ can be ordered as single pieces. If fabrics are not found, please call for quotation.



# **GRADE A+** Comparison Fabrics Chart

Frankford Grade A+ Recacril<sup>®</sup> fabrics include, but are not limited to, the colors below. All non-stocking Grade A+ fabrics carry extended lead times.

schbrella°	<b>6 C C</b>			outdura			
4651/6051 Silver ┥	• R-114	Pearl					
4642/5453/6042 Oyster ┥	• R-117	Raw	•	──► Sand	6034		
4648/5461/6048 Taupe ┥	• R-127	Moonrock	•	─► Taupe	6026		
4672/5476/6072 Heather Beige ┥	• R-139	Heather Beige					
4645 Seagrass Green ┥	R-142	Emerald	•	> Emerald	6065		
4620/6020 Beige ┥	• R-143	Hemp Beige					
4678/6078 Marine Blue ┥	• R-170	Admiral Blue	•	> Royal Navy	6022		
4679/5499/6079 Ocean Blue ┥	• R-173	Dark Blue	•	Classic Royal Blue	6041		
<b>4688</b> Basil <del>•</del>	• R-187	Jade					
4615 Smoke ┥	• R-194	Ash					
4644/54048/6044 Charcoal Grey ┥	• R-198	Nickel					
5415 Melon ┥	• R-241	Phoenix					
4676/5425 Cocoa ┥	• R-243	Tapenade					
4652/6052 Med. Blue ┥	• R-911	Baltic					
4643/5456/6043 Persian Green 🔫	• R-292	Teal	•	→ Oz Green	6016		
4653/6053 Med. Blue Tweed ┥	• R-769	Baltic Tweed					
4607/6007 Charcoal Tweed ┥	• R-770	Charcoal Tweed	•	Tuxedo Tweed	6047		
4617/6017 Royal Blue Tweed ┥	• R-772	Blue Tweed	•	Catalina Blue	6014		
4654/6054 Linen Tweed ┥	• R-775	Linen Tweed	•	Desert Beige	6032		

# P.44

# **BASE AND MOUNTS** POWDER COATS/FINISH GUIDE

FINISH AVAILABLE 🛛 🐼 FINISH DISCLAIMER 🛛 🔀						MATERIAL FINISH Stainless Steel Galvanized Steel				
	• MS	● SM	<b>W</b> G	<b>₿</b> HW	○ BK	● WH	• BZ	○ CB	● MS	
	BRUSHED SILVER SATINANODIZED	SILVER MIST	GOLDEN OAK	HEATHER WILLOW	ΟΝΥΧ	ELLIHM ENIGTIY	DESERT BRONZE	CARBON	BRUSHED SILVER RESIN PIGMENT	MATERIAL FINISH
RESIN COATED										
50C					$\bigtriangledown$	$\bigcirc$	$\bigcirc$		$\bigcirc$	
23					$\bigcirc$	$\bigcirc$	$\bigcirc$		$\bigcirc$	
ALUMINUM SHELLS		teel Stem mu				e. ( <b>8ST / 18S</b> T	<b>T / 18ST-2</b> ).			
100A		$\bigtriangledown$		<b>⊘</b> *			Ø.	Ø.		
150A		$\bigcirc$		Ø		Ø.	Ø,			
STEEL PLATES										
50S		$\bigcirc$			$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$		
75S		$\bigcirc$			$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$		
GALVANIZED STEEL		teel Stem mu		n for <b>Centerp</b> e	ost Umbrell			ase. ( <b>8ST / 18</b>	ST / 18ST-2).	
24G										•
30G										•
36G										•
40G										•
20G-SQ										•
24G-SQ										•
36G-SQ	Chairdean G		et he chece	for Contorn	e et Unebuell			/0CT / 10		
WHEEL BASE 480-L	Stainless St	leet Stem Mt	ist be chose	n for <b>Centerp</b> e		as and paired	d with this b	ase. ( <b>851 / 18</b>	51/1851-2).	
PAVER BASES										
XB+C		$\bigtriangledown$			$\bigtriangledown$					
NGU550-L	$\bigcirc$				 ⊘*	Ø.	Ø.			
SPECIALTY MOUNTS										
DP		$\bigcirc$			$\bigcirc$					*
IG										•
BZ/BZ2		$\bigcirc$								
CMLK		$\overline{\bigcirc}$								<u></u>
	$\bigcirc$									

# UMBRELLA BASE GUIDE

Recommendations by Application and Umbrella

# | TA

TABLE USE


Suitable for use beneath a table. It is not recommended as a free-standing base option.

# FREE-STANDING USE

Recommended as a free-standing option, but can also be suitable for use beneath a table if the table provides enough clearance.

# 1.5" STEM (8ST / 18ST )

Indicates the base can accommodate an 1.5"/38mm center pole.



Indicates the base can accommodate a 2"/50mm center pole.



• •	• •	••		••	• •		••	
• •	••	••		••	• •		••	
		••		•••	••		••	
	•••	•••	• •	•••	•••	• •		• •
• •	• •	••		••	• •		••	
••	••			••				
	• •	••		•••	• •		••	
	•••	•••		•••				
••	••	••	• •	••	••	• •	••	• •
••	••	••	• •	••	••	• •	••	• •
• •	• •	• •		• •	• •		••	
	•••	• •		•••	• •		• •	
••	••	••	• •	••	••	• •	••	• •
••	••	••	• •	••	••	• •	••	• •
		• • •         • • •	• • •       • • •         • • •       • • •	••••       ••••         ••••       ••••	• • •       • • •       • • •         • • •       • • •       • • •	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot \cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot \cdot \cdot \cdot$ $\cdot \cdot \cdot$ $\cdot \cdot \cdot$ $\cdot \cdot \cdot$ $\cdot \cdot $	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$

# LED CLIPS

When the sun sets, you no longer need to close your umbrella just yet. Light up your resort, restaurant or cherished outdoor space with Frankford's new LED Lighting and LED Clips specifically designed for all umbrella collections.

LED-C2

LED-C3

Monterey Fiberglass

Aurora Fiberglass G-Series Monterey


Eclipse Aurora Aluminum G-Series Greenwich Greenwich

LED-C1

# **MOTION SENSOR SLIM LED LIGHT**

Stylish and functional Ultra thin LED lights paired with the low-profile clip allows you to leave on the umbrella without having to remove to close the umbrella.

- 5000K Temp @ 320 Lumens Max
- 17.25"L x 1.5"W x .5"H
- DC5V/3W/4400mAh Lithium Battery (28hrs at low power / 12hrs Full Power)

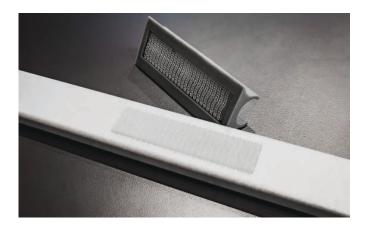



# **BASES /** MOUNTS

Guide to shade anchoring solutions

Properly securing your umbrella is crucial to ensuring years of sun protection and longevity. The following section will guide you through our wide variety of everyday bases and anchoring solutions. These included options are suitable for use beneath a table or in a free-standing setting.

# Remember, Your Shade Is Only As Good As Its Foundation

Frankford umbrellas are all thoroughly tested and built to ensure durability and longevity; however, we do not recommend the use of any non-permanent umbrella in unsafe wind conditions. The size and installation location of your umbrella play a significant role when selecting the base/anchoring method required for safe operation. Please consult an authorized Frankford Dealer or factory representative directly for recommendations.

Umbrellas must be secured in a base equal to or greater than the options recommended in this catalog and must be secured properly using the thumb screws or other hardware supplied with each base. Failure to properly secure umbrellas with the base options recommended, and with the supplied hardware will void the Frankford Umbrellas warranty. Furthermore, all umbrellas should always be closed and secured when not in use and taken down when winds reach unsafe conditions.



# **RESIN COATED CONCRETE**



**50C** Resin Table Base

- Weight: **50lbs.**/22 kg.
- Dimensions: **16**"/40cm **6**"/15cm
- 1.5"/ 3.8cm Diameter Umbrella Pole
- Table Use

# **PREMIUM ALUMINUM SHELL**



#### 100A Premium Aluminum

- Weight: 100 lbs. / 45 kg.
- Dimensions: 24" / 60cm 3.5"/ 9cm
- Free-Standing Use **18ST(2)** Table Use **8ST(2)**

Aluminum, concrete-filled shell with rear hooded wheels. Must be paired with a stem.



- 23 Resin Base Table/Free-Standing
- Weight: 80 lbs./36 kg.

MS BK WH BZ

- Dimensions: 20"/50cm 11.5"/30cm
- 1.5" / 3.8cm Diameter Stem
- Table Use





150A Premium Aluminum

- Weight: **150 lbs.**/68 kg.
- Dimensions: 30"/76cm 3.5"/9cm
- Free-Standing Use 18ST(2)

Aluminum, concrete-filled shell with rear hooded wheels. Must be paired with a stem.



#### 8ST/18ST/18ST-2 Stems

- 8ST: 8"/20cm 1.5"/3.8cm
- 18ST: 18"/45cm 1.5"/3.8cm
- 18ST-2: 18"/45cm 2"/5cm

Stainless steel stems are not available in any finish other than Polished Stainless Steel.

# STEEL PLATE SM BR WH BZ CB



**50S** Steel Plate Base

- Weight: **50lbs.**/22 kg.
- Dimensions: 20"/50cm 11"/28cm
- **1.5**"/3.8cm Diameter Stem
- Table Use



75S Steel Plate Wheel Base

- Weight: **75 lbs.**/34 kg.
- Dimensions: 24"/61cm 16.5"/42cm
- 1.5" / 3.8cm Diameter Stem
- Free-Standing

# **GALVANIZED STEEL PLATE BASES**



24G Round Galvanized Steel Plate

- Weight: **70 lbs.**/32 kg.
- Dimensions: 24"/60cm .5"/12.7mm
- Table Use

Can be stacked up to three (3) plates. Must be paired with a stem.



- 30G Round Galvanized Steel Plate
  - Weight: **100 lbs.**/45 kg.
- Dimensions: 30"/76cm .5"/12.7mm
- Free-Standing or Table Use

Can be stacked up to three (3) plates. Must be paired with a stem.



### 36G Round Galvanized Steel Plate

- Weight: **150 lbs.**/68 kg.
- Dimensions: 36"/91cm .5"/12.7mm
- Free-Standing Use

Can be stacked up to three (3) plates. Must be paired with a stem.



40G Round Galvanized Steel Plate

- Weight: **185 lbs.**/83 kg.
- Dimensions: 40"/101cm .5"/12.7mm
- Free-Standing Use

Can be stacked up to three (3) plates. Must be paired with a stem.



### 20G-SQ Galvanized Steel Base

- Weight: **70 lbs.**/32 kg.
- Dimensions: 20"/50cm .5"/12.7mm
- Table Use

Cannot be stacked. Must be paired with a stem.



#### 24G-SQ Galvanized Steel Base

- Weight: 100 lbs./45 kg.
- Dimensions: 24"/60cm .5"/12.7mm
- Free-Standing or Table Use

Cannot be stacked. Must be paired with a stem.



#### 36G-SQ Galvanized Steel Base

- Weight: 200 lbs./90 kg.
- Dimensions: 36"/91cm .5"/12.7mm
- Free-Standing Use

Can be stacked up to three (3) plates. Must be paired with a stem.



36G-SQ+W Galvanized Steel Base

- Weight: **214 lbs.**/97 kg.
- Dimensions: 36"/91cm 5"/12.7cm
- Free-Standing Use /+₩

Can be stacked up to three (3) plates. Must be paired with a stem.



# 8ST/18ST/18ST-2 Stems

- 8ST: 8"/20cm 1.5"/3.8cm
- 18ST: 18"/45cm 1.5"/3.8cm
- 18ST-2: 18"/45cm 2"/5cm

Stainless steel stems are not available in any finish other than Polished Stainless Steel.

# **SPECIALTY** MOUNTING

# Direct Surface and In-Ground Mounting Options For Center Post Umbrellas

Frankford's umbrellas are all thoroughly tested and built to ensure durability and longevity; however, we do not recommend the use of any non-permanent umbrella in unsafe wind conditions. The size and installation location of your umbrella play a significant role when selecting the base/anchoring method required for safe operation. Please consult an authorized Frankford dealer or factory representative directly for recommendations.

Frankford Umbrellas' warranty is only applicable to products that are properly secured to an appropriately weighted base, installed in-ground or surface mount. The warranty does not cover damage caused to an umbrella structure or base as a result of improper anchoring or severe acts of nature, including any damage caused by contact with a foreign object (this includes contact with the ground).

Umbrellas must be secured in a base equal to or greater than the options recommended in this catalog and must be secured properly using the thumb-screws or other hardware supplied with each base. Failure to properly secure umbrellas with the base options recommended, and with the supplied hardware, will void the Frankford Umbrellas warranty. Furthermore, all umbrellas should always be closed and secured when not in use, and taken down when winds reach unsafe conditions.



We recommend to consult a licensed professional before installing all in-ground and direct surface installations.

# SPECIALTY MOUNTING



### 8ST/18ST/18ST-2 Stems

- 8ST: 8"/20cm 1.5"/3.8cm
- 18ST: 18"/45cm 1.5"/3.8cm
- 18ST-2: 18"/45cm 2"/5cm

Stainless steel stems are not available in any finish other than Polished Stainless Steel.



#### BZ2-SM In-Ground Mounting Stem

- Weight: **11 lbs.**/5 kg.
- Stem: **16**"/40cm **2**"/5cm
- In-Ground: **8.5**"/21cm
- Free-Standing In-Ground Use

in-ground sleeve installation with removable stem.



# **CMLK** Surface Mounting Stem

Weight: **9 lbs.**/4 kg.

•

- Dimensions: **18**"/45cm **4**"/10cm
- **1.5**"/3.8cm Diameter Stem
- Free-Standing Surface Mount
- SS Upgrade Available CMLK-SS 💣

Surface mounting plate installation with attachable 18" Stem. Installation hardware not included.



# 38SAP Soft Surface Anchor

- Weight: **4 lbs.**/1.8 kg.
- Dimensions: 27"/68cm
- 1.5"/3.8cm Diameter Umbrella

1.5" Aluminum sand anchor sleeve. Can be used with all 1.5" diameter aluminum and wooden bottom poles.

Customer must drill a hole to accommodate hitch pin.



# **BZ-SM** In-Ground Mounting Stem

- Weight: **11 lbs.**/5 kg.
- Stem: **16**"/40cm **1.5**"/3.8cm
- In-Ground: 8.5"/21cm
- Free-Standing In-Ground Use

in-ground sleeve installation with removable stem.



#### 38SAP-2 Soft Surface Anchor

- Weight: 4 lbs./1.8 kg.
- Dimensions: 38"/96cm
- 2"/5cm Diameter Umbrella

2" Aluminum sand anchor sleeve. Only to be used with all G-Series Greenwich and Monterey.

Customer must drill a hole to accommodate hitch pin.

# **SPECIFIC** MOUNTING ECLIPSE<sup>®</sup> / AURORA / NOVA / G-SERIES

Frankford's umbrellas are all thoroughly tested and built to ensure durability and longevity; however, we do not recommend the use of any non-permanent umbrella in unsafe wind conditions. The size and installation location of your umbrella play a significant role when selecting the base/anchoring method required for safe operation. Please consult an authorized Frankford dealer or factory representative directly for recommendations.

Frankford Umbrellas' warranty is only applicable to products that are properly secured to an appropriately weighted base, installed in-ground or surface mount. The warranty does not cover damage caused to an umbrella structure or base as a result of improper anchoring or severe acts of nature, including any damage caused by contact with a foreign object (this includes contact with the ground).

Umbrellas must be secured in a base equal to or greater than the options recommended in this catalog and must be secured properly using the thumb-screws or other hardware supplied with each base. Failure to properly secure umbrellas with the base options recommended, and with the supplied hardware, will void the Frankford Umbrellas warranty. Furthermore, all umbrellas should always be closed and secured when not in use, and taken down when winds reach unsafe conditions.



We recommend to consult a licensed professional before installing all in-ground and direct surface installations.

FINISH DISCLAIMER 🛛 🌟 See current MSRP for Upcharge (+MSRP)

# **ECLIPSE<sup>®</sup> SPECIFIC**



# 40Gx3 Galvanized Steel Stack

- Weight: 555 lbs./252 kg.
- Dimensions: 40"/101cm 1.5"/3.8cm
- Free-Standing Use

Required minimum galvanized stack for the Eclipse® Cantilever.



# NGU550 Galvanized Steel Max Base

- Weight: 550 lbs./249 kg.
- Dimensions: 45"/114cm 5"/12.7cm
- Powder Coated Aluminum Cover
- Free-Standing Use

Commercial use and large area base.



# 36G-SQx3 Galvanized Plate Stack

- Weight: **600 lbs.**/272 kg.
- Dimensions: 36"/91cm 1.5"/3.8cm
- Free-Standing Use

Required minimum galvanized stack for the Eclipse® Cantilever.



# 480 Galvanized Steel Base

- Weight: **80 lbs.**/36 kg.
- Dimensions: **34**"/86cm **6.5**"/16.5cm
- Powder Coated Aluminum Cover
- Free-Standing Use **RESIDENTIAL ONLY**

Required: (12) 16" x 16" Pavers to properly weight the base to **480 lbs.**/217 kg. **PAVERS NOT INCLUDED** 



# 36G-SQx3+W Galvanized Steel Stack 🔵

- Weight: **614 lbs.**/279 kg.
- Dimensions: 36"/91cm 6"/15.2cm
- Free-Standing Use /**+₩**

Required minimum galvanized stack for the Eclipse® Cantilever.



480 Galvanized Steel Base w/Wheels

- Weight: 94 lbs./43 kg.
- Dimensions: 34"/86cm 11"/28cm
- Powder Coated Aluminum Cover
- Free-Standing Use **RESIDENTIAL ONLY**

Required: (12) 16" x 16" Pavers to properly weight the base to **480 lbs.**/217 kg. **PAVERS NOT INCLUDED** 



# **DP** Direct Surface Mounting Plate

- Weight: **12 lbs.**/5 kg.
- Dimensions: 12.5"/32cm .5"/12.7mm
- Free-Standing Surface Installation
- SS Upgrade Available DP-SS 💣

Direct surface mounting plate for decking or concrete. Installation hardware not included.



IG In-Ground Mount

- Weight: **18 lbs.**/8.5 kg.
- Dimensions: 8.5"/21cm 14"/35cm
- Free-Standing In-Ground Installation

In-ground mounting into soft soil or concrete. Installation hardware not included.

Powder Coated Galvanized Steel

# **AURORA/AURORA-F SPECIFIC**



40G+36G Galvanized Steel Stack

- Weight: 335 lbs./152 kg.
- Dimensions: 40"/101cm 1"/2.5cm
- Free-Standing Use

Required minimum galvanized stack for the Aurora/Aurora-F Cantilever.



# 480 Base

- Weight: 80 lbs./36 kg. •
- Dimensions: 34"/86cm 6.5"/16.5cm •
- Powder Coated Aluminum Cover
- Free-Standing Use RESIDENTIAL ONLY •

Required: (12) 16" x 16" Pavers to properly weight the base to 480 lbs./217 kg. **PAVERS NOT INCLUDED** 



XB+C Modular Cross Base w/ Cover

- Weight: 38 lbs./17 kg. •
- Dimensions: 40"/101cm .5"/12.7mm
- Free-Standing Use RESIDENTIAL ONLY •

Required: (8) 16" x 16" Pavers to properly weight the base to 335 lbs./152 kg. **PAVERS NOT INCLUDED** 



# 36G-SQx2 Galvanized Plate Stack

- Weight: 400 lbs./181 kg.
- Dimensions: 36"/91cm 1"/2.5cm
- Free-Standing Use

Required minimum galvanized stack for the Aurora/Aurora-F Cantilever.



# 480 Galvanized Base w/Wheels

- Weight: 94 lbs./43 kg.
- Dimensions: 34"/86cm 11"/28cm
- Powder Coated Aluminum Cover
- Free-Standing Use RESIDENTIAL ONLY •

Required: (12) 16" x 16" Pavers to properly weight the base to **480 lbs.**/217 kg. PAVERS NOT INCLUDED



# 36G-SQx2+W Galvanized Steel Stack

- Weight: 414 lbs./188 kg.
- Dimensions: 36"/91cm 6"/15.2cm
- Free-Standing Use /+W

Required minimum galvanized stack for the Aurora/Aurora-F Cantilever.



**XB** Modular Cross Base w/o Cover

- Weight: **36 lbs.**/16 kg.
- Dimensions: 39"/99cm 5"/12.7cm
- Free-Standing Use **RESIDENTIAL ONLY**

Required: (8) 16" x 16" Pavers to properly weight the base to **335 lbs.**/152 kg. **PAVERS NOT INCLUDED** 



**DP** Direct Surface Mounting Plate

- Weight: 12 lbs./5 kg.
- Dimensions: 12.5"/32cm .5"/12.7mm
- Free-Standing Surface Installation
- SS Upgrade Available DP-SS 💣 •

Direct surface mounting plate for decking or concrete. Installation hardware not included.

Powder Coated Galvanized Steel



IG In-Ground Mount

- Weight: 18 lbs./8.5 kg.
- Dimensions: 8.5"/21cm 14"/35cm
- Free-Standing In-Ground Installation •

In-ground mounting into soft soil or concrete. Installation hardware not included.

# **NOVA SPECIFIC**



# NGU550 Galvanized Steel Max Base

- Weight: 550 lbs./249 kg.
- Dimensions: 45"/114cm 5"/12.7cm
- Powder Coated Aluminum Cover
- Free-Standing Use

Galvanized steel box frame with powder coated aluminum covers.



# **NGU-DP** Direct Surface Mounting Plate

- Weight: **20 lbs.**/9 kg.
- Dimensions: 16"/40cm .5"/12.7mm
- Free-Standing Surface Installation

Direct surface mounting plate to decking or concrete. Installation hardware not included.

Coated Galvanized Steel



# IG In-Ground Mount

- Weight: **18 lbs.**/8.5 kg.
- Dimensions: 8.5"/21cm 14"/35cm
- Free-Standing In-Ground Installation

In-ground mounting into soft soil or concrete. Installation hardware not included.

We recommend to consult a licensed professional before installing all in-ground and direct surface installations.

# **G-SERIES SPECIFIC**



40G+18ST-2 Galvanized Plate

- Weight: **185 lbs.**/83 kg.
- Dimensions: 40"/101cm .5"/12.7mm
- Stem: (18ST2) 18"/45cm 2"/5cm
- Beauty Plate Included
- Free-Standing Use

Can stack up-to three (3) plates for additional weight.



#### 36G-SQ+W+18ST-2 Galvanized Plate

- Weight: 214 lbs./97 kg.
- Dimensions: 36"/91cm 4.5"/11.4cm
- Stem: (**18ST2**) **18**"/45cm **2**"/5cm
- Beauty Plate Included
- Free-Standing Use /+W

Can stack up-to three (3) plates for additional weight.



# 150A+18ST2 Premium Aluminum

- Weight: 150 lbs./68kg.
- Dimensions: **30**"/76cm **3.5**"/ 9cm
- Stem: (**18ST2**) **18"**/45cm **2**"/5cm
- Free-Standing Use

Aluminum, concrete-filled shell with rear hooded wheels.

Stainless steel stems are not available in any finish other than Polished Stainless Steel.



# 36G+18ST-2 Galvanized Plate

- Weight: **150 lbs.**/68 kg.
- Dimensions: 36"/91cm .5"/12.7mm
- Stem: (18ST2) 18"/45cm 2"/5cm
- Beauty Plate Included
- Free-Standing Use

Can stack up-to three (3) plates for additional weight.



# 480 Galvanized Steel Base

- Weight: **80 lbs.**/36 kg.
- Dimensions: **34**"/86cm **6.5**"/16.5cm
- Stem: (**18ST2**) **18"**/45cm **2"**/5cm
- Powder Coated Aluminum Cover
- Beauty Plate Included
- Free-Standing Use

•

Required: (12) 16" x 16" Pavers to properly weight the base to **480 lbs.**/217 kg. **PAVERS NOT INCLUDED** 



# BZ2-SM In-Ground Mounting Stem

- Weight: **11 lbs.**/5 kg.
- Stem: 16"/40cm 2"/5cm
- In-Ground: 8.5"/21cm
- Free-Standing In-Ground Use

in-ground sleeve installation with removable stem.



# 36G-SQ+18ST-2 Galvanized Plate

- Weight: **200 lbs.**/90 kg.
- Dimensions: 36"/91cm .5"/12.7mm
- Stem: (**18ST2**) **18**"/45cm **2**"/5cm
- Beauty Plate Included
- Free-Standing Use

Can stack up-to three (3) plates for additional weight.



480 Galvanized Steel Base w/Wheels

- Weight: **94 lbs.**/43 kg.
- Dimensions: 34"/86cm 11"/28cm
- Stem: (18ST2) 18"/45cm 2"/5cm
- Powder Coated Aluminum Cover
- Beauty Plate Included
- Free-Standing Use

Required: (12) 16" x 16" Pavers to properly weight the base to **480 lbs.**/217 kg. **PAVERS NOT INCLUDED** 



# 38SAP-2 Soft Surface Anchor

- Weight: **4 lbs.**/1.8 kg.
- Dimensions: 38"/96cm
- 2"/5cm Diameter Umbrella
- Free-Standing In-Ground Use

2" Aluminum sand anchor sleeve. Only to be used with all G-Series Greenwich and Monterey.

Customer must drill a hole to accommodate hitch pin.



# **G-SERIES GREENWICH ALUMINUM MARKET**

10ft. x 10ft. Square Giant Fiberglass Umbrella • 2" Diameter Pole-Pulley Lift / WG - Golden Oak Powder Coat **VF** - Chrome Plated Vertex Finial Frankford LED Rib Attachment and LED Light (LED-C1+LED) QTY: 2 Recasens<sup>®</sup> R-099 White (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: 36G+18ST-2 - 150lbs. 36" Round Galvanized Steel Plate + 18" Stainless Steel Stem



883CAM-SQ-WG-R099

# **RESIDENTIAL** WARRANTIES

As a condition of doing business with Frankford Umbrellas, all persons involved in the commercial purchase, sale, or resale of Frankford products shall be bound by the following terms and conditions.

**DISTRIBUTION** - Frankford reserves the right to respond to geographic and individual market and competitive situations by applying different policies to its various Dealers. Frankford also reserves the right to rescind or modify, in its sole and absolute discretion, any existing or future sales program or policy, or credit terms (if any) extended to a Dealer. In addition, Frankford may terminate any authorized Dealer, for any reason or no reason, in its sole and absolute discretion and without notice.

**ERRORS** - There may be errors in the prices, descriptions, or images of certain merchandise in our catalog or sales material. Frankford reserves the right to restrict orders of those items.

**LIABILITY** - In no event will Frankford be liable to the Dealer for any lost profits, lost savings, or any consequential, incidental, or special damages arising out of or in connection with the parties' relationship, even if Frankford has been put on notice of the possibility of such damages. Without limitation to the foregoing, under no circumstances will Frankford be liable to the Dealer for punitive damages.

Frankford reserves the right to alter or modify designs, product styles, or product specifications and discontinue frames and fabrics to the entire range of manufactured and distributed products without prior notice.

**WIND DAMAGE** - Wind ratings do not form part of, nor fall under, any of Frankford Umbrellas' warranties. Wind ratings are intended as a guide to the relative strength of the umbrellas only and tested at their optimal positions. Umbrellas with any degree of tilt added should not follow any wind ratings on pg. 45. Wind can be extremely variable, depending on the surroundings, elevation, gusts, etc. In high wind or sudden extreme weather conditions, all umbrellas should be closed and secured immediately, regardless of size, weight, or base weight and never be left unattended or tilted in the open position.

Frankford will not be held responsible for damage to your umbrella, furniture, or property. Frankford Umbrellas' **2024 MSRP** and **Catalog** contain minimum recommendations for necessary weight, but this can vary depending on conditions.

**ELEVATED/ROOFTOP** - Warranties and published wind ratings do not apply to any umbrella on a rooftop or an elevated patio above the ground level of the property.

10-YEAR FABRIC - Frankford offers 9 oz. marine-grade solution-dyed acrylic fabric from several mills, including Sunbrella<sup>®</sup>, Outdura<sup>®</sup>, and RECASENS. All marine-grade acrylic fabrics we use carry a warranty of 10 years from the original date of purchase. All upholstery-grade fabrics we use carry a warranty of 5 years from the original date of purchase. The warranty protects against the significant loss of strength and color in normal atmospheric conditions. The product must be properly installed, maintained, and under normal use and environment. This warranty does not cover damage caused by contact with foreign objects, abuse, negligence, vandalism, burns of any kind, improper cleaning techniques, normal wear, perforations, weather soiling, environmental pollution stains, natural disasters, rot, mildew, or acts of nature. Damage caused by the storage method or location used by clients is not covered.

To ensure our products' longevity, we recommend closing your umbrella and securing it with a tie band in high winds. In addition, be sure the fabric is pulled away from the ribs as outlined below. High winds will cause the umbrella fabric to rub together, causing friction, which can result in premature thinning of the fabric, discoloration, and possible pinholes over extended use. We strongly suggest the use of a protective cover or safely storing the umbrella until the winds and harsh weather subside. Damage of this nature is not covered under warranty.

When opening and closing the umbrella, the user must be sure all fabric is pulled away from the ribs to prevent unnecessary rubbing of the fabric against the frame or hardware. This could result in premature wearing or holes in the fabric. Damage of this nature is not covered under warranty.

The warranty, if applicable, does not cover labor frames, systems, or installation supplied by the dealer or reseller. The replacement fabric canopy is covered for the time remaining in the original warranty and does not activate a new 10-year or 5-year warranty.

**5-YEAR FRAME** - Frankford warrants the crank and auto tilt mechanisms in the **MONTEREY** for a period of 5 years from the original date of purchase. This warranty includes manufacturer defects of crank handles, crank axles, auto tilts, push-button tilts, and para-cord. Frankford warrants the frame structure of the **ECLIPSE®**, **AURORA**, **NOVA**, **G-SERIES**, **GREENWICH**, **MONTEREY**, **CATALINA**, and **AVALON** for a period of 5 years from the original date of purchase. This warranty includes manufacturer defects to the notch, runner, center pole, and skeleton structure. This warranty does not include damages sustained to these umbrellas if operated improperly, while in any degree of tilt, or if left unattended. Before opening any umbrella, gently "fluff" the umbrella ribs (spread them apart by hand) first, and then begin to open the umbrella. If you feel any impingement whatsoever during opening, halt opening and repeat this process until there is no more resistance.

**3-YEAR POWDER COAT/FINISH** - Frankford warrants all powder coat finishes on aluminum masts in **ECLIPSE**<sup>®</sup>, **AURORA, NOVA, G-SERIES, GREENWICH, MONTEREY, CATALINA**, and **LAUREL** for a period of 3 years from the original date of purchase. This warranty includes chipping, peeling, flaking, bubbling, and fading of the powder coat finish on the aluminum masts only.

1-YEAR FRAME/STRUCTURE - Frankford warrants the frame structure of the LAUREL, EMERALD COAST, FC101, SHADE STAR, LIFEGUARD, and CB87 for a period of 1 year from the original date of purchase. This warranty includes manufacturer defects to the notch, runner, center pole, and skeleton structure. Frankford warrants all umbrella bases for a period of one 1 year from the original date of purchase.

**1-YEAR UMBRELLA BASE** - Frankford warranty covers manufacturing defects only. It does not cover breakage due to contact with foreign objects, chipping of the finishes, crumbling of concrete, or any damage associated with transporting the base.

**3-YEAR FIBERGLASS RIB REPLACEMENT** - In the event of damage that is not warrantable occurs to fiberglass ribs from the **MONTEREY** collection, Frankford offers a free replacement program for 3 years from the original date of purchase. Shipping charges are not included in this program.

**RUST** - is a natural part of the aging process for all steel and iron-based materials; therefore it is not considered a defect and is not covered under any of Frankford Umbrellas' warranties. Steel bases and mounts are designed to require minimum maintenance and should be kept clean and well maintained.

Galvanized steel will show unavoidable imperfections due to the finishing process and therefore, must be accepted in the condition in which it is received.

**SEASIDE AND INDOOR/OUTDOOR POOL USE** - Salt and chlorides can accumulate on the powder coat finishes and on raw material finishes, such as Brushed Silver (**MS**) (umbrella specific) and Platinum (**SR**), leading to premature finish failure.

Failure or neglect to make needed cleanings on powder coat finishes may cause paint to blister, flake, or bubble, and such failure will void limited warranty. Failure to maintain umbrella and base finishes may cause aluminum and metals to pit, oxidize, or corrode. Such failure will void all warranties.

Frankford Umbrellas' warranties do not cover damage to any umbrellas or umbrella bases related to extreme weather, abuse, misuse, or any damage that occurs as a result of contact with the ground or any other foreign object due to sudden and severe weather events or other extreme acts of nature.

Frankford Umbrellas' warranties are only applicable to products that are properly secured to Frankford bases or anchoring systems equal to or greater than recommended by Frankford. Failure to properly secure Frankford Umbrellas to Frankford bases equal to or greater than recommended will void all warranties. If warrantable damage occurs, Frankford will refinish, replace, or repair any item in this category at its own discretion.

# **COMMERCIAL** WARRANTIES

As a condition of doing business with Frankford Umbrellas, all persons involved in the commercial purchase, sale, or resale of Frankford products shall be bound by the following terms and conditions.

**DISTRIBUTION** - Frankford reserves the right to respond to geographic and individual market and competitive situations by applying different policies to its various Dealers. Frankford also reserves the right to rescind or modify, in its sole and absolute discretion, any existing or future sales program or policy, or credit terms (if any) extended to a Dealer. In addition, Frankford may terminate any authorized Dealer, for any reason or no reason, in its sole and absolute discretion and without notice.

**ERRORS** - There may be errors in the prices, descriptions, or images of certain merchandise in our catalog or sales material. Frankford reserves the right to restrict orders of those items.

**LIABILITY** - In no event will Frankford be liable to the Dealer for any lost profits, lost savings, or any consequential, incidental, or special damages arising out of or in connection with the parties' relationship, even if Frankford has been put on notice of the possibility of such damages. Without limitation to the foregoing, under no circumstances will Frankford be liable to the Dealer for punitive damages.

Frankford reserves the right to alter or modify designs, product styles, or product specifications and discontinue frames and fabrics to the entire range of manufactured and distributed products without prior notice.

**WIND DAMAGE** - Wind ratings do not form part of, nor fall under, any of Frankford Umbrellas' warranties. Wind ratings are intended as a guide to the relative strength of the umbrellas only and tested at their optimal positions. Umbrellas with any degree of tilt added should not follow any wind ratings on pg. 45. Wind can be extremely variable, depending on the surroundings, elevation, gusts, etc. In high wind or sudden extreme weather conditions, all umbrellas should be closed and secured immediately, regardless of size, weight, or base weight and never be left unattended or tilted in the open position.

Frankford will not be held responsible for damage to your umbrella, furniture, or property. Frankford Umbrellas' 2024 MSRP and Catalog contain minimum recommendations for necessary weight, but this can vary depending on conditions.

**ELEVATED/ROOFTOP** - Warranties and published wind ratings do not apply to any umbrella on a rooftop or an elevated patio above the ground level of the property.

7-YEAR FABRIC - Frankford offers 9 oz. marine-grade solution-dyed acrylic fabric from several mills, including Sunbrella®, Outdura®, and RECASENS. All marine-grade acrylic fabrics we use carry a warranty of 7 years from the original date of purchase. All upholstery-grade fabrics we use carry a warranty of 5 years from the original date of purchase. The warranty protects against the significant loss of strength and color in normal atmospheric conditions. The product must be properly installed, maintained, and under normal use and environment. This warranty does not cover damage caused by contact with foreign objects, abuse, negligence, vandalism, burns of any kind, improper cleaning techniques, normal wear, perforations, weather soiling, environmental pollution stains, natural disasters, rot, mildew, or acts of nature. Damage caused by the storage method or location used by clients is not covered.

To ensure our products' longevity, we recommend closing your umbrella and securing it with a tie band in high winds. In addition, be sure the fabric is pulled away from the ribs as outlined below. High winds will cause the umbrella fabric to rub together, causing friction, which can result in premature thinning of the fabric, discoloration, and possible pinholes over extended use. We strongly suggest the use of a protective cover or safely storing the umbrella until the winds and harsh weather subside. Damage of this nature is not covered under warranty.

When opening and closing the umbrella, the user must be sure all fabric is pulled away from the ribs to prevent unnecessary rubbing of the fabric against the frame or hardware. This could result in premature wearing or holes in the fabric. Damage of this nature is not covered under warranty.

The warranty, if applicable, does not cover labor frames, systems, or installation supplied by the dealer or reseller. The replacement fabric canopy is covered for the time remaining in the original warranty and does not activate a new 10-year or 5-year warranty.

**2-YEAR CRANK MECHANISM** - Frankford warrants the crank mechanisms in the MONTEREY for a period of 2 years from the original date of purchase. This warranty includes manufacturer defects of crank handles, crank axles, and paracord.

**3-YEAR FRAME** - Frankford warrants the frame structure of the **ECLIPSE®**, **ECLIPSE®**, **AURORA**, **NOVA**, **G-SERIES**, **GREENWICH**, **MONTEREY**, **CATALINA**, and **AVALON** for a period of 3 years from the original date of purchase. This warranty includes manufacturer defects to the notch, runner, center pole, and skeleton structure. This warranty does not include damages sustained to these umbrellas if operated improperly, while in any degree of tilt, or if left unattended.

Before opening any umbrella, gently "fluff" the umbrella ribs (spread them apart by hand) first, and then begin to open the umbrella. If you feel any impingement whatsoever during opening, halt opening and repeat this process until there is no more resistance.

**3-YEAR POWDER COAT/FINISH** - Frankford warrants all powder coat finishes on aluminum masts in **ECLIPSE**<sup>®</sup>, **AURORA, NOVA, G-SERIES, GREENWICH, MONTEREY, CATALINA**, and **LAUREL** for a period of 3 years from the original date of purchase. This warranty includes chipping, peeling, flaking, bubbling, and fading of the powder coat finish on the aluminum masts only.

1-YEAR FRAME/STRUCTURE - Frankford warrants the frame structure of the LAUREL, EMERALD COAST, FC101, SHADE STAR, LIFEGUARD, and CB87 for a period of 1 year from the original date of purchase. This warranty includes manufacturer defects to the notch, runner, center pole, and skeleton structure. Frankford warrants all umbrella bases for a period of one 1 year from the original date of purchase.

**1-YEAR UMBRELLA BASE** - Frankford warranty covers manufacturing defects only. It does not cover breakage due to contact with foreign objects, chipping of the finishes, crumbling of concrete, or any damage associated with transporting the base.

**RUST** - is a natural part of the aging process for all steel and iron-based materials; therefore it is not considered a defect and is not covered under any of Frankford Umbrellas' warranties. Steel bases and mounts are designed to require minimum maintenance and should be kept clean and well maintained.

Galvanized steel will show unavoidable imperfections due to the finishing process and therefore, must be accepted in the condition in which it is received.

**SEASIDE AND INDOOR/OUTDOOR POOL USE** - Salt and chlorides can accumulate on the powder coat finishes and on raw material finishes, such as Brushed Silver (**MS**) (umbrella specific) and Platinum (**SR**), leading to premature finish failure.

Failure or neglect to make needed cleanings on powder coat finishes may cause paint to blister, flake, or bubble, and such failure will void limited warranty.

Failure to maintain umbrella and base finishes may cause aluminum and metals to pit, oxidize, or corrode. Such failure will void all warranties. Frankford Umbrellas' warranties do not cover damage to any umbrellas or umbrella bases related to extreme weather, abuse, misuse, or any damage that occurs as a result of contact with the ground or any other foreign object due to sudden and severe weather events or other extreme acts of nature.

Frankford Umbrellas' warranties are only applicable to products that are properly secured to Frankford bases or anchoring systems equal to or greater than recommended by Frankford. Failure to properly secure Frankford Umbrellas to Frankford bases equal to or greater than recommended will void all warranties. If warrantable damage occurs, Frankford will refinish, replace, or repair any item in this category at its own discretion.

# **SHIPPING / RETURNS**

**GROUND / FREIGHT DELIVERIES** - Frankford would like to ensure the highest level of service. All of our products are made to order and shipped directly from us to you. Because of this, shipping times often vary depending on what product is ordered, what fabric is used (Grades A or A+, B-F), the quantity ordered, and the time of year the order is placed.

All small package and small quantity orders will be shipped using parcel companies (USPS, UPS, FedEx, or other) unless otherwise specified. Some of our larger items and larger quantity shipments must be shipped with an LTL trucking company. Additional charges may be incurred for the following services: Lift Gate Service, Residential Delivery, Call Before Delivery, Express Delivery, Weekend/Holiday Delivery, Guaranteed Delivery, Redelivery, or Change of Address.

Frankford will not be responsible for any express shipping costs or order cancellations unless we have guaranteed a specific delivery date in writing. No verbal guarantees will be honored. customer is responsible for additional charges added at the time of delivery (Inside Delivery, Lift Gate, Change of Address, etc.). **FREIGHT QUOTES ARE ONLY VALID FOR 14 DAYS.** 

**SCHEDULING** - Deliveries may be disrupted by natural disasters and other factors beyond our control. In these cases, Frankford shall not be liable for any damages caused by a failure to deliver or delays in delivery.

Orders may be delayed due to lack of information on order form. Information includes, but is not limited to, shipping address, company/contact name, phone number, shipping method/instructions, item number/description. Frankford will not be responsible for charges incurred due to lack of information provided. For shipping quotes/inquiries, email a customer service representative.

**CANCELLATIONS** - No cancellations, changes, additions, or holds will be accepted on any order for which materials have been ordered or produced.

- Cancellations and/or changes of product or shipping dates on EARLY BUY orders must be received in writing within 15 days of the order date.
- Cancellations and/or changes of product or shipping dates on ALL OTHER orders must be received in writing within 1 business day of the order date.

**SHORTAGES** - It is the Dealer's/customer's responsibility to inspect all merchandise and to file a claim with the carrier in the event of product shortage. Make a notation on the Bill of Lading as to the number of cartons short. Frankford must also be notified within 24 hours of any shortages. File the claim with the delivery carrier immediately. No claim for shortages, damaged items, or errors will be honored unless it is made in writing on the Bill of Lading immediately upon receipt of shipment. Notwithstanding anything to the contrary in this agreement, failure to make a claim on the Bill of Lading will constitute a waiver of any right to a refund or credit.

In addition, it is the Dealer's/customer's responsibility to inspect all merchandise to ensure they have received the correct product, fabric colors and frame finishes. Any discrepancies must be reported in writing within 48 hours of receipt.

**CONCEALED DAMAGE** - If damage is discovered when unpacking the merchandise, immediately mark the damaged area and submit a written request for the carrier to inspect.

- Do not remove the merchandise from the original carton until the carrier inspection is complete.
- If the merchandise was shipped using Frankford's carrier and account, it is the Dealer's/customer's responsibility to notify Frankford immediately and to provide all proper documentation so that a claim can be filed.

**VISIBLE DAMAGE** - It's Dealer's/customer's responsibility to check the merchandise for visible damage and file a claim with the carrier if the shipment was made using the dealer's carrier account. Request a claim form from the delivering carrier and file your claim immediately.

- If the shipment was made using Frankford's carrier and account, it is the Dealer's/customer's responsibility to check the merchandise and notify Frankford Umbrellas within 24 hours of delivery so that a claim can be filed.
- In either situation, make a notation on the Bill of Lading as to the nature and extent of the damage, take photos, check carton count, and obtain a signature from the carrier's agent.
- Failure to provide this information within 24 hours of delivery may result in the carrier refusing to honor the claim, and Frankford will not, under this circumstance, be liable for damage sustained in transit.

# PURCHASER/CLIENT TRANSIT AND INSTALLATION-

Frankford is not responsible or liable for any damages that occur during transit to a customer's home or any location by the purchaser or third-party delivery services.

- Frankford is not responsible or liable for any damages incurred when the customer is transporting their product from the location of purchase to their home.
- Frankford is not responsible or liable for mechanical damages incurred during installation before the product is fully installed and operational.
- Frankford, under no circumstances, will be responsible for punitive damages to persons or property due to an improper or faulty installation.

**GRADE A RETURNS** - All requests for returns of stock merchandise must be made within 7 days of receipt of merchandise. Returns will not be accepted without a written Return Authorization (RA#) from the factory. It is the Dealer's/customer's responsibility to follow routing instructions. Please fax/email a request for an RA#. Your request must include the following information:

- Company name, contact name and number.
- The Frankford Umbrellas invoice and/or acknowledgment.
- The item number, number of units to be returned and carton total
- The reason for the return.
- Which carrier will be returning the items and the date of the shipment.

Any stock item that is returned for credit is subject to a 25% restocking fee (and must be properly packaged and in resalable condition) plus inbound and outbound freight charges.

PLEASE NOTE: ECLIPSE<sup>®</sup>, AURORA, NOVA, G-SERIES, and GREENWICH are considered custom orders. Returns will not be accepted.

**GRADE A+/B-F RETURNS** - Umbrellas made with Grade A+ through F fabrics and/or that have printing are not subject to a refund or credit. These items are manufactured or printed to the Dealer's/customer's specifications, and as such, may not be returned. No cancellations, changes, additions, or holds will be accepted on any order for which materials have been ordered or produced.

NOTE: ECLIPSE<sup>®</sup>, AURORA, NOVA, G-SERIES, and GREENWICH are considered custom orders. Returns will not be accepted.

# **CARE** AND MAINTENANCE

**FABRIC CARE** - Recacril® 9 oz. marine-grade acrylic fabric is treated with the Infinity Process, a highly technological finish providing Recacril® with long-lasting protection against mold and mildew, excellent water and oil repellency, and protection from the sun. However, the accumulation of dust, pollution particles, foreign organic materials, and general dirt can damage this protection, shortening the life of the Recacril®.

The most effective method for maintaining Recacril<sup>®</sup> is to clean the canvas once a month with water, using a low-pressure hose. It is very important that after cleaning with water, the canvas be allowed to completely dry before rolling or storing your umbrella. If for any reason you must roll and/or store a wet umbrella, it must be unrolled and opened as soon as possible to dry. In times of continuous rain, it is advisable to keep the umbrella rolled and stored.

If periodic washing with water is done, in most environments, you should only need to do a more thorough cleaning every 2-3 years.

Recacril® is highly resistant to the growth of fungus, mold, and mildew. However, these can grow on embedded dirt. To clean these stains, follow these more intensive cleaning procedures.

# FABRIC CRAZING/MARBLING - Crazing is an inherent

characteristic of all solution-dyed acrylic fabrics and is caused by folding or creasing of the fabric during production or installation.

- Crazing lines appear as white lines on dark-colored fabrics when frontlit, and dark lines on light-colored fabrics when backlit. The primary contributors to crazing are the resins added in the final stages of manufacturing. These resins add stiffness so the fabric lies flat during sewing, which is critical for the manufacturing process.
- These resins can be viewed as an industrial fabric starch with a specific end purpose. Crazing does not affect the performance or characteristics of RECASENS, Sunbrella®, Outdura®, or other acrylic fabrics. The fabric remains water repellent as well as stain and mildew resistant, and the lines will diminish over time with exposure to the elements.

# CASUAL CARE/CLEANING

- Brush off dust and dirt with a soft brush. NEVER brush with stiff brushes since this can damage the fabric finish.
- Spray the umbrella with clean water. If a hose is used, avoid high pressure.
- Prepare a solution of solvent-free soap in warm water (no more than 100°F) and apply it to the fabric and stitching.
- Scrub with a soft brush, allowing the solution to penetrate the fabric.
- Rinse with water to remove all traces of soap.
- Let air dry and do not close the umbrella until canvas is completely dry.

# **INTENSIVE CARE/CLEANING**

- Brush off dust and dirt with a soft brush. NEVER brush with stiff brushes as this can damage the fabric finish.
- Prepare a solution with 10% household bleach, 20% solvent-free neutral detergent (free & clear detergents), and 70% water.
- Apply the solution to the fabric, allowing it to remain between 15 and 20 minutes maximum.
- Rinse with clean water several times. Any bleach residues remaining on the canvas, combined with the sun, could damage the fabric and stitching.
- Let air dry and do not close the umbrella until canvas is completely dry.
- Repeat the process if necessary.

**BASE CARE**-Do not let dirt build up on the bases. Bases should be cleaned with mild soap and water. Seasonal touch-up of any scratches, chips, occasional rust seepage from crevices, or hidden or unfinished surfaces inherent in some designs is all that is required.

Never leave bases standing in water. To keep your bases looking their best, you may wish to store them when not in use for an extended period of time.

Finishes will vary slightly depending on the final process and raw materials on which they are applied.

**POWDER COATED STEEL BASE/STEM** - Upon receiving your powder coated steel base and/or mount, apply a rust inhibitor to the inside of the steel stem. The stems are powder coated steel: however, the inside of the stem lacks total coverage, exposing the raw steel and accelerating natural deterioration.

**PREVENTIVE MAINTENANCE PRO TIP**: Ferrous metals are naturally in the air and can adhere and etch in to any surface. These small particles can rust on the surface giving an unsightly look. To combat this, before setting up your base, rinse with clean, fresh water, towel dry or air dry, and apply WD-40 Specialist Long-Term Corrosion Inhibitor to the entirety of the base. Repeat this twice a year to ensure the longevity of your base.

Periodically hose powder coated steel bases, steel umbrella stems, and steel mounts with warm, fresh water and a mild detergent. This should be a part of a weekly routine to ensure the longevity of all steel products.

**VISUAL RUST** - If you notice rust stains, rinse the steel product with warm water and a mild detergent to determine its origin. Once the damaged area has been discovered, scrub off the visible rust using warm water, white vinegar, and a stainless steel wire brush (steel wire brushes will leave further iron deposits on the surface).

Once rust (orange oxidation) is visibly gone, apply a thin coat of Rust-Oleum® Stops Rust® Rust Inhibitor Spray to the affected area. Then apply the closestmatching Rust-Oleum® paint available at your local hardware store.

Rusty water stains may appear from rusting ferrous metal deposits on the surface, not the actual product. The most common place this would occur is from the umbrella stem/threads. Remove the stem and clean with warm, fresh water; white vinegar; and a soft sponge or brush. Dry off with a towel, apply WD-40 Specialist Long-Term Corrosion Inhibitor to the threads of the umbrella stem and female receiving cup of the stem.

**VINYL CARE** -The most effective method for maintaining Frankford's heavy-gauge vinyl is to clean the vinyl once a month with water, using a garden hose to prevent the accumulation of dust, pollution particles, foreign organic materials, and general dirt stains. For more embedded stains, brush the loose dirt away with a soft brush and rinse the vinyl with a garden hose. Use a vinyl cleaner, sponge, and lukewarm water to scrub away stubborn stains. Do not use dish detergent as this will dry out the vinyl and expedite the aging process of the vinyl material.

**CLEANING ABS PLASTICS** - Frankford uses electroplating on our plastic crank boxes for Brushed Silver (**MS**) and Platinum (**SR**) finishes. This is to protect the plastic parts from corrosion. The plating process will also increase the wear resistance and strength of the product. To clean these specific finishes, follow the methods below.

**TOOTHPASTE** - Removes light scuffs and cloudiness.

- Spread a thin layer of opaque white (no gel) toothpaste on the surface of the chrome plating. Rub the toothpaste with a soft, clean cloth in small circular and swirling patterns (little to no force).
- Using a fresh, dry cloth or microfiber, wipe away the toothpaste, revealing a shiny, clean surface.

#### WHITE VINEGAR - General Cleaning.

- Pour undiluted distilled white vinegar in to a spray bottle and begin to spray the surface until saturated.
- Using a fresh, dry cloth or microfiber, wipe while simultaneously buffing away the vinegar.



# AURORA PREMIUM ALUMINUM CANTILEVER

11ft. Octagonal Premium Aluminum Cantilever Umbrella / **MS** - Brushed Silver Anodized Finish Recasens® R-099 White (**GRADE A**) 9oz. Marine Grade Acrylic Fabric Mounting: **XB+C-SM** - Aurora Specific Modular Cross Base w/ Silver Mist Powder Coated Cover



# SHADE F DESIGNER

# ECLIPSE<sup>®</sup> DESIGNER CANTILEVER

10ft. x 10ft. Square Designer Aluminum Cantilever Umbrella / **MS** - Brushed Silver Anodized Finish Recasens® R-099 White /Recasens® R-176 Logo Red 6" Trim" (**Grade A+**) 9oz. Marine Grade Acrylic Fabric Mounting: **40Gx3** - Triple Galvanized Steel Plate Stack

